

Anemostat® SUBMITTAL

1220 Watson Center Road • Carson, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448
air@anemostat.com • www.anemostat.com

Model **ABC-7001** DIRECT DIGITAL CONTROLS ADVANCED APPLICATION AIR TERMINAL CONTROLLERS

DIRECT DIGITAL CONTROLS

DESCRIPTION AND APPLICATION

The ABC-7001 are native BACnet, direct digital controllers designed for VAV terminal units. An integrated actuator and the supplied programs make these ideal controllers for temperature setback, overrides, proportional reheat and other HVAC sequences. Install these versatile controllers in stand-alone environments or networked to other BACnet devices. As part of a complete facilities management system, the ABC-7001 controllers provide precise monitoring and control of connected points.

- BACnet MS/TP compliant
- Automatically assigns the MAC address and the device instance
- Standard VAV control sequences are incorporated to provide pressure independent control of a single-duct VAV unit.
- On-board airflow sensor for use with a single or multi-point differential pressure measuring station or pitot tube.
- Use to control heating, cooling, cooling with heat change-over, cooling with time proportional reheat or three-stage, sequential reheat.

SPECIFICATIONS

Inputs

Universal inputs	3
Air flow sensor	1
Key features	Universal inputs programmable as analog, binary or accumulator objects. Standard units of measure. Overvoltage input protection

Pull-up resistors	Switch select none or 10kΩ
Connector	Removable screw terminal block, wire size 14–22 AWG
Conversion	10–bit analog–to–digital conversion
Pulse Counting	Up to 16 Hz
Input range	0–5 volts DC
NetSensor	Compatible with models ABC-1161 and ABC-1181.

Outputs

Universal Outputs	3
Key features	Output short protection Universal outputs programmable as analog or binary objects. Standard units of measure
Connector	Removable screw terminal block Wire size 14–22 AWG
Output voltage	0–10 volts DC analog 0–12 volts DC binary


Output current	100 mA per output
Communications	
BACnet MS/TP	EIA–485 operating at rates up to 76.8 kilobaud. Automatic baud detection. Automatically assigns MAC addresses and device instance numbers Removable screw terminal block. Wire size 14–22 AWG
NetSensor	Compatible with models ABC-1161 and ABC-1181, Connects through RJ–12 connector.
Programmable features	
Control Basic	10 program areas
PID loop objects	4
Value objects	40 analog and 40 binary
Supported objects BACnet objects	See PIC statement for supported
Schedules	
	8 schedule objects
	3 calendar object
Trend objects	8 each of which holds 256 samples
Alarms and events	
Intrinsic reporting	Supported for input, output, value, accumulator, trend and loop objects.
Notification class objects	8



All dimensions are in inches.

JOB NAME:

SUBMITTED BY:



Anemostat® SUBMITTAL

1220 Watson Center Road • Carson, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448
air@anemostat.com • www.anemostat.com

Model **ABC-7001** DIRECT DIGITAL CONTROLS ADVANCED APPLICATION AIR TERMINAL CONTROLLERS

DIRECT DIGITAL CONTROLS

Memory Programs and program parameters are stored in nonvolatile memory. Auto restart on power failure

Applications programs Anemostat supplies the ABC-7001 with programming sequences for VAV applications:

- Heating-cooling changeover
- VAV with time proportional reheat
- VAV with three-stage reheat.
- Custom sequences per specification

Air sensor features Platinum-ceramic flow-through

Actuator specifications

Torque 50 in-lb. (5.7 N•m) minimum
70 in-lb. (7.9 N•m) maximum

Angular rotation 0 to 95°
Adjustable end stops at 45/60/90° rotation

Motor timing 18°/minute at 60 Hz
15°/minute at 50 Hz

Shaft size Fits 0.5 inch (13 mm) round shafts.
See Shaft adapters on page 7 for 0.38 inch shafts.

Regulatory UL 916 Energy Management Equipment FCC Class B, Part 15, Subpart B BACnet Testing Laboratory listed

Installation

Supply voltage 24 volts AC, -15%, +20% 25 VA

Weight 2.4 lb. (1.1 kg)


Case material Flame retardant green plastic

Environmental limits

Operating 32 to 120°F (0 to 49°C)
Shipping -40 to 140°F (-40 to 60°C)
Humidity 0-95% relative humidity (non-condensing)


ACCESSORIES

Shaft adapters
HFO-0011 3/8 inch (9.5 mm) shaft adapter

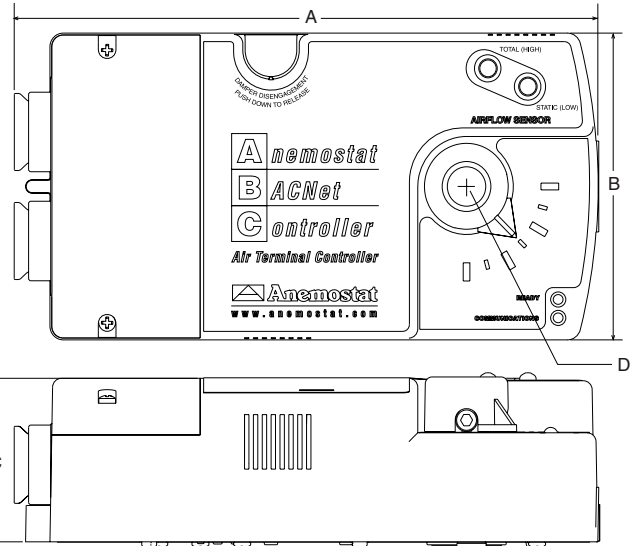

ABC-7001 Dimensions

A	B	C	D
8.23 in.	4.22 in.	2.25 in.	0.51 in.
209 mm	107 mm	57 mm	13 mm

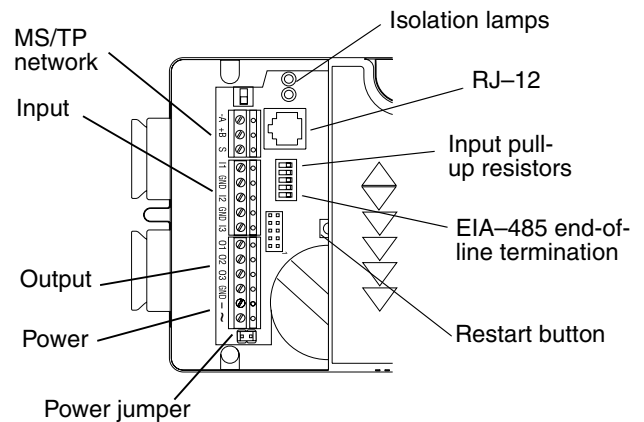

ABC-7001 Connection points inside wiring compartment

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: