

UFAD



B

- Compatible with our FS, SC, and WC Series access floor systems.
- Static dissipative powder coat finish.
- Slide damper allows for precise CFM requirements.
- Load ratings of 1250 lbs. per sq.in. To ensure performance equal to solid floor panels.
- 56% open area generates over twice the air flow when compared to traditional perforated panels.



SLIDE DAMPER

OPPOSED BLADE DAMPER

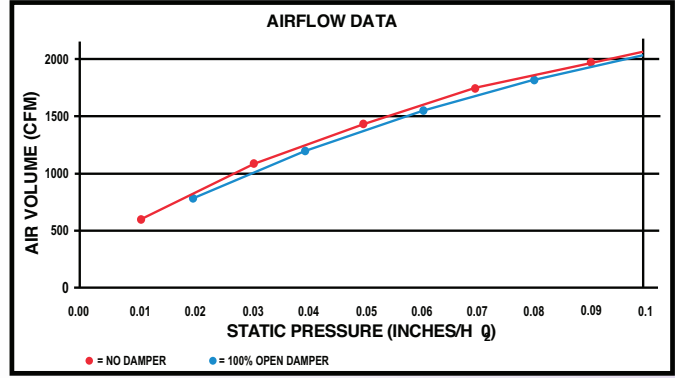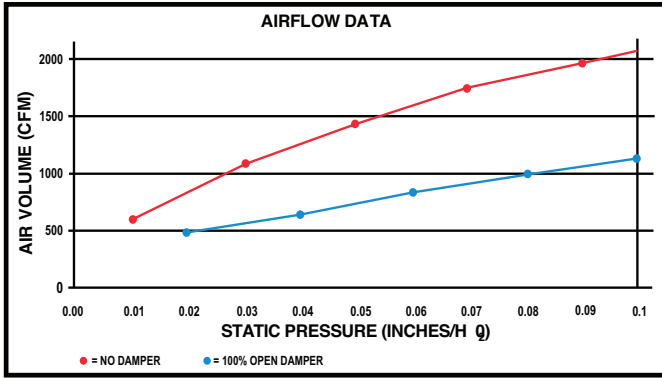

Panel Type	Understructure	Concentrated Load	Safety Factor
Grate-56	Bolted Stringer	1250 lbs/sq. In.	>2

Load testing based on CISCA test procedures.