



SC Series Panels feature a cementitious treated core for improved Class A / Class I fire performance.

SC Series WoodCore Panel System

Camino's SC Panels are manufactured in Canada with a composite cementitious treated wood core and a galvanized steel shell precisely sized to have superior performance for underfloor air applications. Panels are available in both bolted-corner and bare corner styles and can be manufactured with high pressure laminate or conductive vinyl finishes for computer room applications. Meets Class I and Class A fire ratings.

APPLICATIONS:

- Offices
- Conference Rooms
- Training Centers
- Libraries
- Auditoriums
- Casinos
- Museums



SC WoodCore Panel System

DS-SC-1213


- Solid, underfoot feel and sound
- Cementitious treated wood core & galvanized steel composite design
- Bare-corner/bolted stringer & bolted corner assembly options
- Conductive ground path from the panel to the pedestal
- Higher combustibility rating than standard wood core panel
- Over-sized panels available for perimeter applications

PERFORMANCE DATA:

MATERIAL PROPERTIES:	SC1000-I	SC1000-M	SC1250-I	SC1250-M	SC1500-I	SC1500-M
Application	General office and computer rooms					
Understructure	stringer or stringerless assemblies - see understructure data sheet for options					
Dimensions	Imperial Panel Dimensions = 24" x 24" (61 cm x 61 cm) Metric Panel Dimensions = 60cm x 60cm (23.62" x 23.62")					
Thickness	1.0" (25.4mm)	1.0" (25.4mm)	1.125" (28.5mm)	1.125" (28.5mm)	1.125" (28.5mm)	1.125" (28.5mm)
Design Load (minimum)	1000 lbs (454kg)	1000 lbs (454kg)	1250 lbs (567kg)	1250 lbs (567kg)	1500 lbs (680kg)	1500 lbs (680kg)
Uniform Load (minimum)	250 lbs (113kg)	250 lbs (113kg)	450 lbs (204kg)	450 lbs (204kg)	450 lbs (204kg)	450 lbs (204kg)
Rolling Load (10 / 10,000 Pass)	1000 lbs / 700lbs	455kg / 318kg	1250 lbs / 875 lbs	568kg / 398kg	1500 lbs / 1000lbs	680kg / 454kg
Safety Factor (minimum)	Minimum 2.0					
Recommended Finishes	carpet tile, HPL, CV	carpet tile, HPL, CV	carpet tile, HPL, CV	carpet tile, HPL, CV	carpet tile, HPL, CV	carpet tile, HPL, CV
Availability	4 to 6 wks					

PANEL SYSTEM DETAILS:

HARDWARE CUT-OUTS:

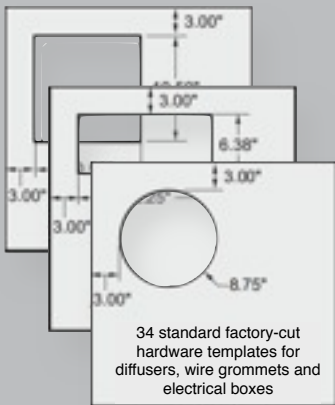

SC PANEL WITH HPL LAMINATE & VINYL EDGE OPTION
(computer room applications - factory applied conductive and dissipative finishes available)



SC PANEL WITH BARE METAL SURFACE & CORNER-BOLT OPTION
(carpet tile application)

