

www.anemostat-hvac.com

SUBMITTAL SHEET



DOUBLE DEFLECTION SUPPLY STAINLESS STEEL

ADJUSTABLE LOUVERS 3/4" BLADE SPACING

PRODUCT FEATURES

- · Louvers individually adjustable
- Optional stainless steel opposed blade volume control damper, face operated (OBD)
- Countersunk screw holes and stainless steel screws

CONSTRUCTION DETAILS

Material: 20 GA 304 stainless steel (std)

20 GA 316 stainless steel (opt)

Finish: Satin polish (std)

Models
☐ 20-S

Short Front Blades,

3/4" Spacing

☐ **20-S-D4** Short F


Short Front Blades, 3/4" Spacing, with OBD

20-L Long Front Blades,

3/4" Spacing

☐ **20-L-D4** Long Front Blades,

3/4" Spacing, with OBD

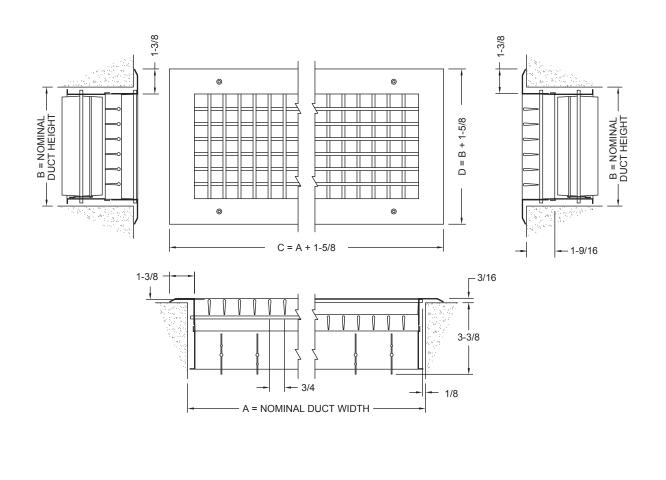

All dimensions are in inches.

JOB NAME: SUBMITTED BY: