



**PRODUCT FEATURES**

- 45 CFM low turbulence horizontal air flow pattern < 50 fpm @ 24" above diffuser.
- Locking factory set screw for minimum or maximum CFM (factory set)
- Face is aluminum, basket and fan is high strength polymer complies with UL 2043.
- Good for interior zone work station applications.
- VAV controls available for perimeter and meeting space & private office applications.
- Gasketed for air leakage control.
- Plug & play Siemens actuator.
- Thermostat controlled with Anemostat Power Supply Module.
- Tested in accordance with ASHRAE 70-2006.

**CONSTRUCTION FEATURES**

**Material:**


- Polymer
- Polymer and Aluminum

**Finish:**

- Charcoal
- Gray
- Beige

**MODELS**

- RFDD-M** Manual Adjustment
- RFDD-AF** Automatic Actuator Driven Floating Control
- RFDD-AP** Automatic Actuator Driven Proportional Control

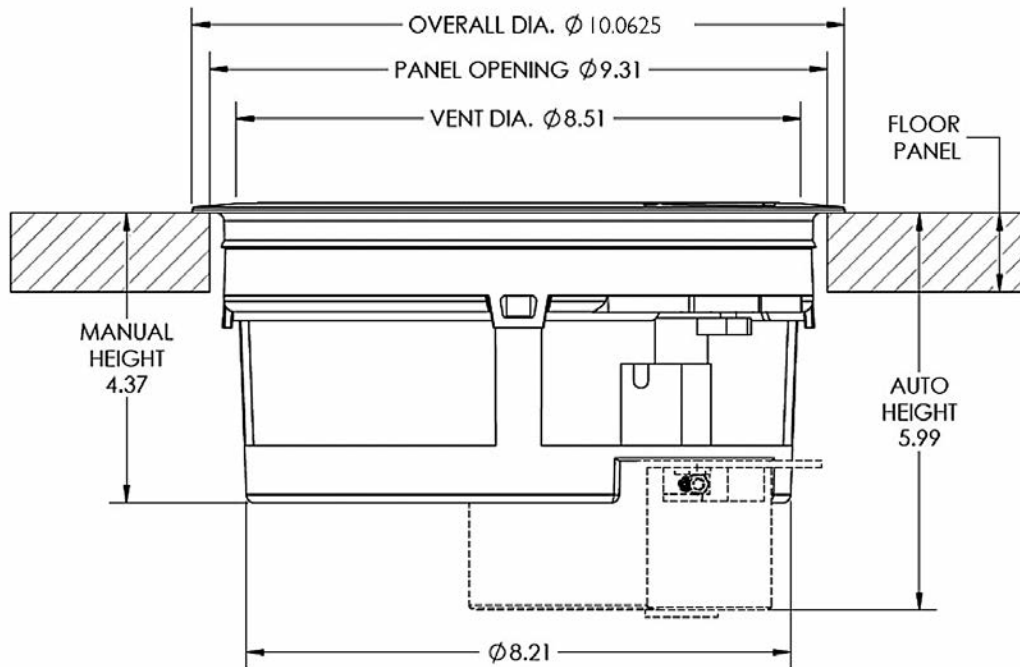

All dimensions are in inches.

**JOB NAME:**

**SUBMITTED BY:**