

**APPLICATION**


- Recommended for cooling and ventilating in spaces requiring high air change rates with difficult air distribution needs
- Fixed, horizontal pattern is maintained with or without ceiling effect.
- Efficient air distribution in cooling applications at temperature differentials as high as 35° F.
- Up to 50 air changes per hour (ACH)
- 360° horizontal air delivery pattern
- Surface mounted or exposed duct

**PRODUCT FEATURES**

- Steel construction – fixed horizontal pattern.
- 5 or 6 expanding cones designed with closed beads providing a minimum of 5 air paths
- Ultimate in aspiration properties by inducing room air within the passageway of the expanding cones in a volume equal to 25-35% of the specified design volume
- Inner cones removable as an assembly
- Arctic White baked-on finish

**DIFFUSER OPTIONS**

- Aluminum construction
- Custom or optional paint colors
- Accessories – see page G-2

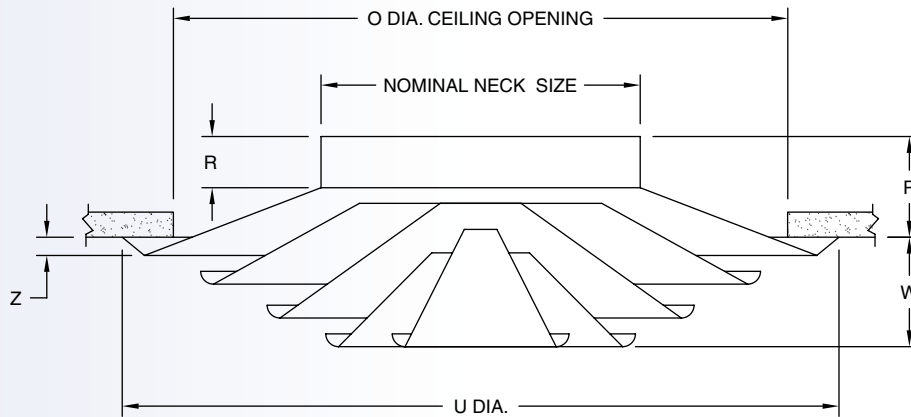

NOMINAL NECK SIZE	O	P	U	W	Z	R	NUMBER OF CONES
6	12	1-7/8	14	2-1/4	1/2	1	5
8	16	2-1/8	18-1/2	2-7/8	9/16	1	
10	20	2-1/2	22-7/8	3-5/8	5/8	1	
12	24	2-7/8	27-1/4	4-1/4	11/16	1	
15	30	3-3/8	33-3/4	5-1/4	3/4	1	
18	36	4	40-5/8	6-1/4	7/8	1	6
21	42	6-3/8	47-1/4	7-1/4	1	2	
24	48	6-7/8	54	8-1/4	1-1/8	2	