


APPLICATION

- Simple but effective volume control device with excellent air flow equalization characteristics.
- The LD is installed in neck of diffuser. Blades are operated from face of diffuser using a 5/32" hex key.

PRODUCT FEATURES

- Coated steel construction
- Consisting of a series of louver blades mounted on an ED equalizing deflector.
- The LD louver damper can be added to any Anemostat round neck diffuser or SRA square to round adapter.
- Flex duct bends may interfere with operation of damper and is not recommended.
- Field installed accessory

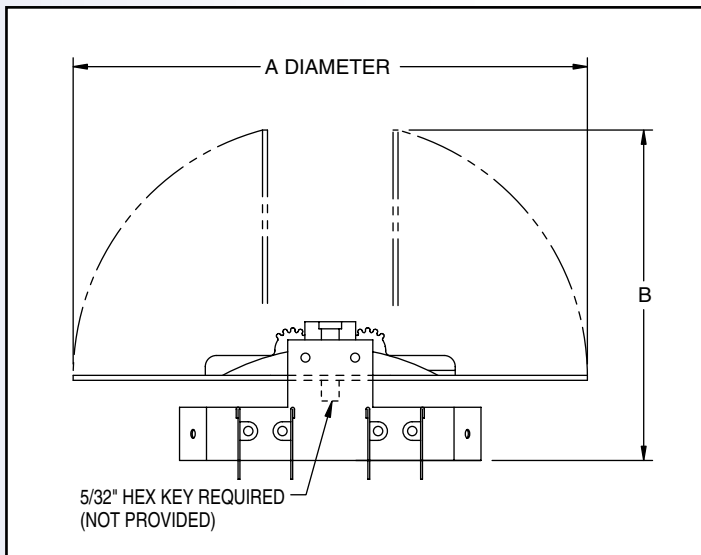

SIZE	A	B
4	3-5/8	3-1/6
5	4-5/8	3-9/16
6	5-5/8	4-1/16
7	6-5/8	4-9/16
8	7-5/8	5-1/16
9	8-5/8	5-9/16
10	9-5/8	6-1/16
12	11-5/8	7-1/16
14	13-5/8	8-1/16
15	14-5/8	8-9/16
16	15-5/8	9-1/16
18	17-5/8	10-1/16

Damper designed for balancing only, not a full shut-off device.