




SUBMITTAL SHEET

www.anemostat-hvac.com

SECURITY GRILLE w/ STEEL WOVEN MESH FACE

FACE SCREW HOLES

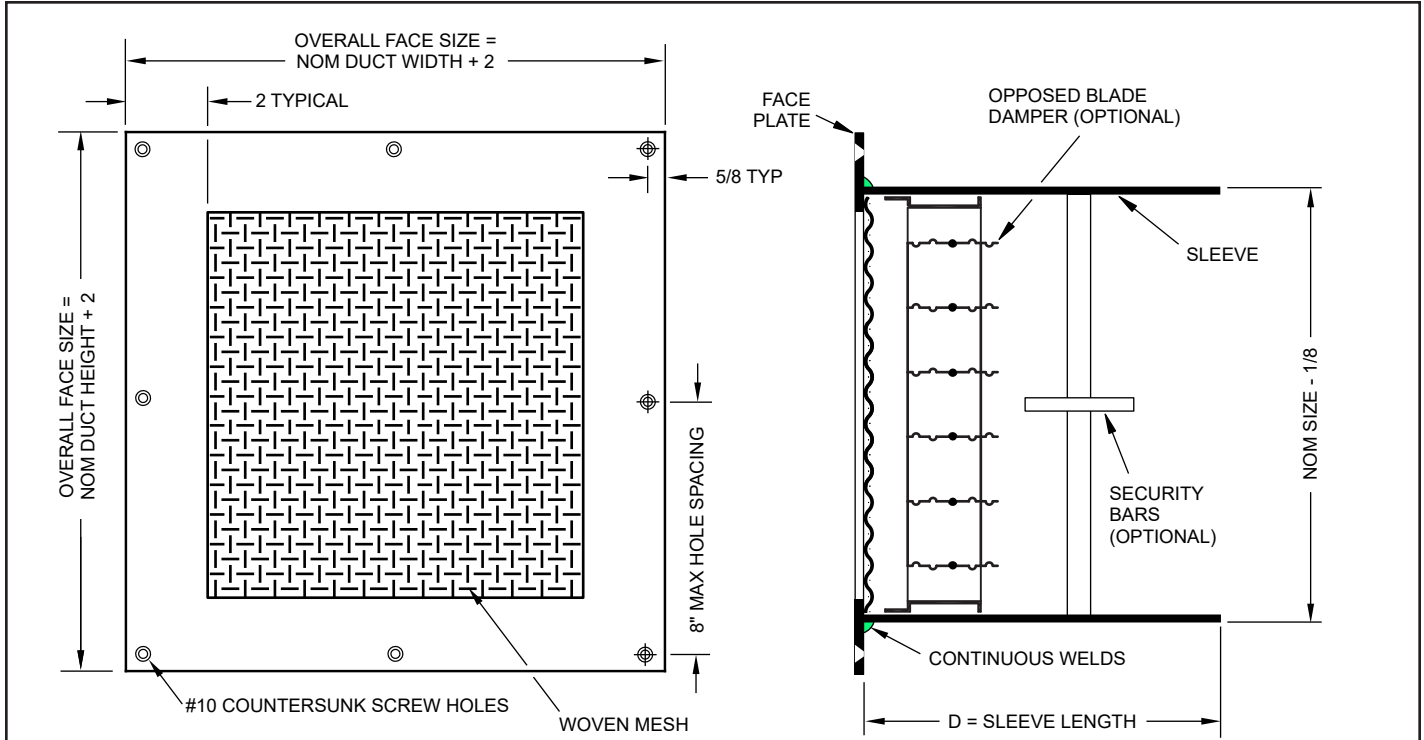

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Face Plate Thickness

- 3/16" GA. (STANDARD)
- 10 GA. 12 GA. 14 GA.
- Other _____

Steel Woven Mesh

- 10 GA. - 1/2" Sq Holes on 5/8" Ctrs (STD)
- 10 GA. - 3/8" Sq Holes on 1/2" Centers
- Other _____

Sleeve Thickness

- 12 GA. (STD) 10 GA. 3/16"
- Other _____

Material

- Plain Steel (STANDARD) Aluminum*
- 304 Stn Stl* 316 Stn Stl* Galvanized*
- Other _____

*(Consult factory for availability)

Finish

- White Powder Coat (STANDARD)
- Rust-Inhibiting Primer
- Other _____

Tamper-Proof Screws

- #10 x 1-1/2" Pinned Flat Head Torx Sheet Metal Screws (STANDARD)
- #10-32 x 1-1/2" Pinned Flat Head Torx Machine Screws
- Other _____

OPTIONAL ACCESSORIES

- Security Bars in Sleeve (see detail sheet)
- Anchor Studs - Nelson (see detail sheet)
- Model OB-1 Opposed Blade Damper - Front Operated
- Model OB-1 Opposed Blade Damper - Rear Operated
- Model SRA Square to Round Duct (ships loose)
- Other Options (please specify) _____

All dimensions are in inches.

| Q T Y | Order Size (NOM DUCT SIZE) | | |
|-------------|-------------------------------|---|---|
| | W | H | D |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

JOB NAME:

SUBMITTED BY: