



# Anemostat®

SECURITY AIR DISTRIBUTION

Model **AMXS**


## SUBMITTAL SHEET

www.anemostat-hvac.com

LATTICE FACE GRILLE w/  
WOVEN MESH FACE

LOCKING ANGLES / FRAME

All dimensions are in inches.

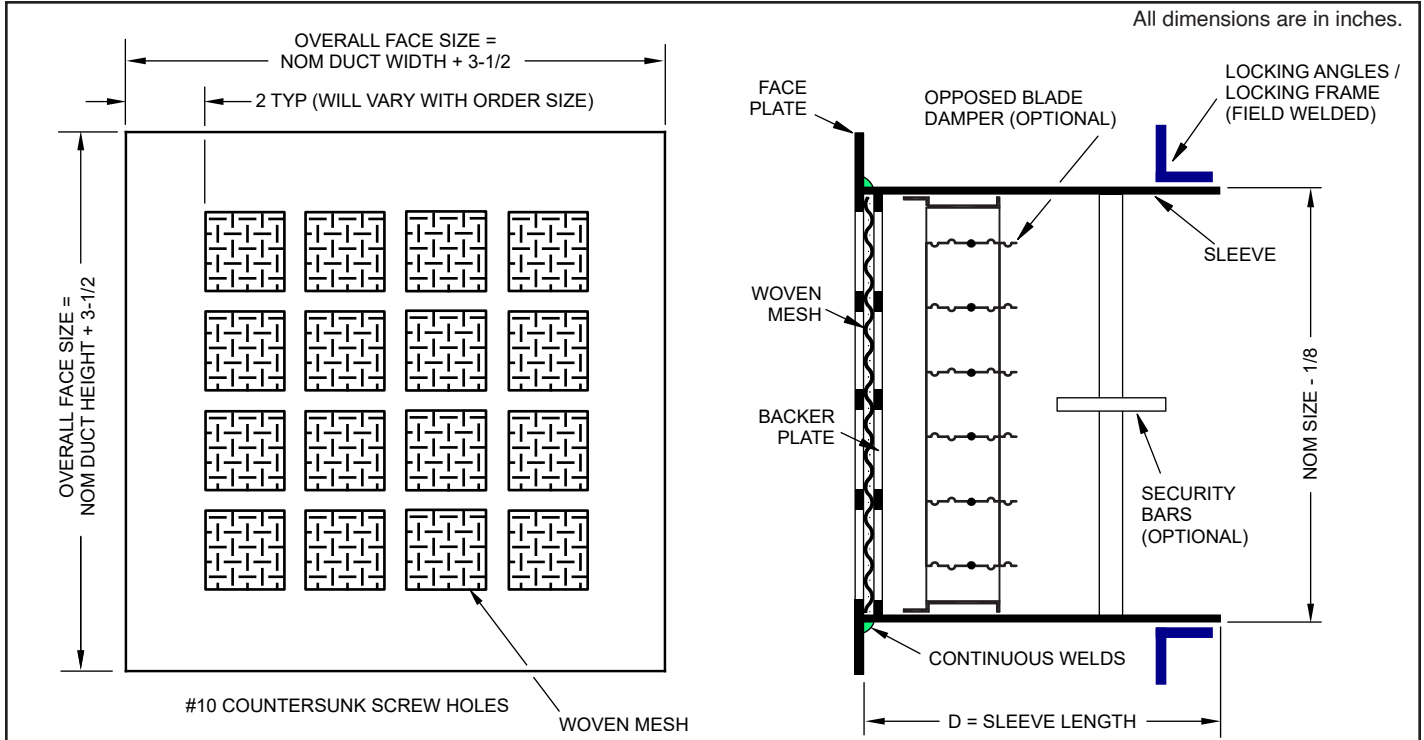

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

### PRODUCT FEATURES

#### Face & Backer Plate Thickness

- 3/16" GA. (STANDARD)
- 10 GA.       12 GA.       14 GA.
- Other \_\_\_\_\_

#### Face Plate Lattice Patterns

- (P3) 2" Sq Holes on 2-1/2" Centers (STD)
- (P4) 2" Square Holes on 3" Centers
- (P1) 9/16" Square Holes on 11/16" Centers
- (P2) 13/16" Square Holes on 1" Centers

#### Steel Woven Mesh

- 10 GA. - 1/2" Sq Holes on 5/8" Ctrs (STD)
- 10 GA. - 3/8" Sq Holes on 1/2" Centers
- Other \_\_\_\_\_

#### Sleeve Thickness

- 12 GA. (STD)       10 GA.       3/16"
- Other \_\_\_\_\_

#### Material

- Plain Steel (STANDARD)       Aluminum\*
- 304 Stn Stl\*       316 Stn Stl\*       Galvanized\*
- Other \_\_\_\_\_ \*(Consult factory for availability)

#### Finish

- White Powder Coat (STANDARD)
- Rust-Inhibiting Primer
- Other \_\_\_\_\_

#### Locking Angle (2 Pieces)

- 1" x 1" x 3/16" (STANDARD)
- 1-1/2" x 1-1/2" x 3/16"
- 2" x 2" x 3/16"
- Other \_\_\_\_\_

#### Locking Frame

- 1" x 1" x 3/16" (Optional)
- Other \_\_\_\_\_

### OPTIONAL ACCESSORIES

- Security Bars in Sleeve (see detail sheet)
- Model OB-1 Opposed Blade Damper - Front Operated
- Model OB-1 Opposed Blade Damper - Rear Operated
- Model SRA Square to Round Duct (ships loose)
- Other Options (please specify) \_\_\_\_\_

Q  
T  
Y

Order Size  
(NOM DUCT SIZE)

W    H    D

Q T Y	Order Size (NOM DUCT SIZE)		
	W	H	D

JOB NAME:

SUBMITTED BY: