



**SOUND  
ATTENUATOR**  
TUBULAR  
DOUBLE WALL  
LOW FREQUENCY  
**FIBERGLASS FILL**

**PRODUCT FEATURES**


- **FILL:** Fiberglass under compression
- Tested in accordance with ASTM E-477
- **ASTM-E84 Rating Characteristics:**  
Flamespread - 10  
Smoke Developed - 10

**CONSTRUCTION FEATURES**


- Casing:**  
12" - 24"      22 GA. Galvanized Steel  
26" - 60"      18 GA. Galvanized Steel
- Baffle:**  
24 GA. Perforated Galvanized Steel

**MODELS**

- ALRA-R**  
 **ALRB-R**  
 **ALRC-R**



End View

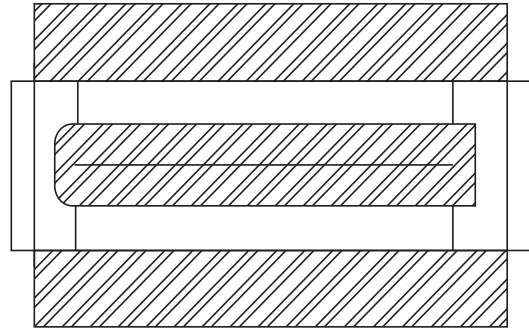

Side View

Casing Width = Diameter + 16"  
Unit Length = 2 X Diameter (minimum 36" long)

By *AEROSONICS*

All dimensions are in inches.

**JOB NAME:**

**SUBMITTED BY:**