



Anemostat®


SECURITY AIR DISTRIBUTION

Model **ASFP**

SUBMITTAL SHEET

www.anemostat-hvac.com

SECURITY FACE PLATE
MINIMUM SECURITY

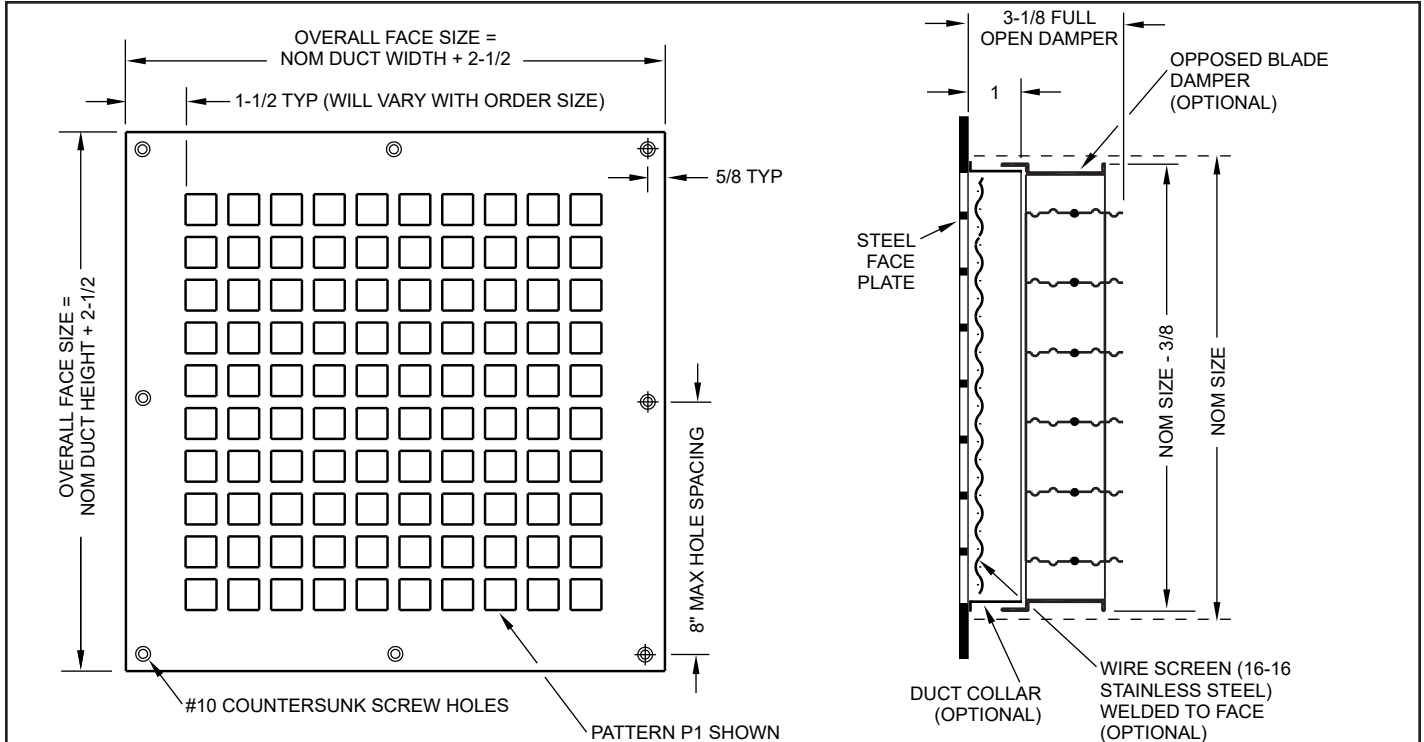

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Thickness

- 12 GA. (STANDARD)
- 3/16" GA. 10 GA. 14 GA.
- Other _____

Perforated Hole Pattern

- (P1) 9/16" Sq. Holes on 11/16" Ctrs. (STD)
- (P2) 13/16" Sq. Holes on 1" Centers
- (P8) 1/4" Dia. Holes on 3/8" Staggered Ctrs
- (P9) 5/16" Dia. Holes on 7/16" Staggered Ctrs
- Other _____

Material

- Plain Steel (STANDARD)
- 304 Stainless Steel* 316 Stainless Steel*
- Aluminum* Galvanized*
- Other _____

*(Consult factory for availability)

Overall Face Size (Nom Duct +)

- 2-1/2" (STANDARD) 3-1/2" 2"

Finish

All dimensions are in inches.

- White Powder Coat (STANDARD)
Rust-Inhibiting Primer
- Other _____

Tamper-Proof Screws

- #10 x 1-1/2" Pinned Flat Head Torx Sheet Metal Screws (STANDARD)
- #10-32 x 1-1/2" Pinned Flat Head Torx Machine Screws
- No Screw Holes / No Screws
- Other _____

OPTIONAL ACCESSORIES

- Model OB-1 Opposed Blade Damper - Front Operated
- Model OB-1 Opposed Blade Damper - Rear Operated
- Duct Collar (20 Ga) - Standard with OB-1 Damper
- Model SRA Square to Round Duct (ships loose)
- Other Options (please specify) _____

| Q T Y | Order Size (NOM DUCT SIZE) | |
|-------------|-------------------------------|---|
| | W | H |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

JOB NAME:

SUBMITTED BY: