



**Anemostat®**  
SECURITY AIR DISTRIBUTION


Model **ASSG**

# SUBMITTAL SHEET

www.anemostat-hvac.com

SECURITY FACE PLATE w/  
SLEEVE

LOCKING ANGLES / FRAME

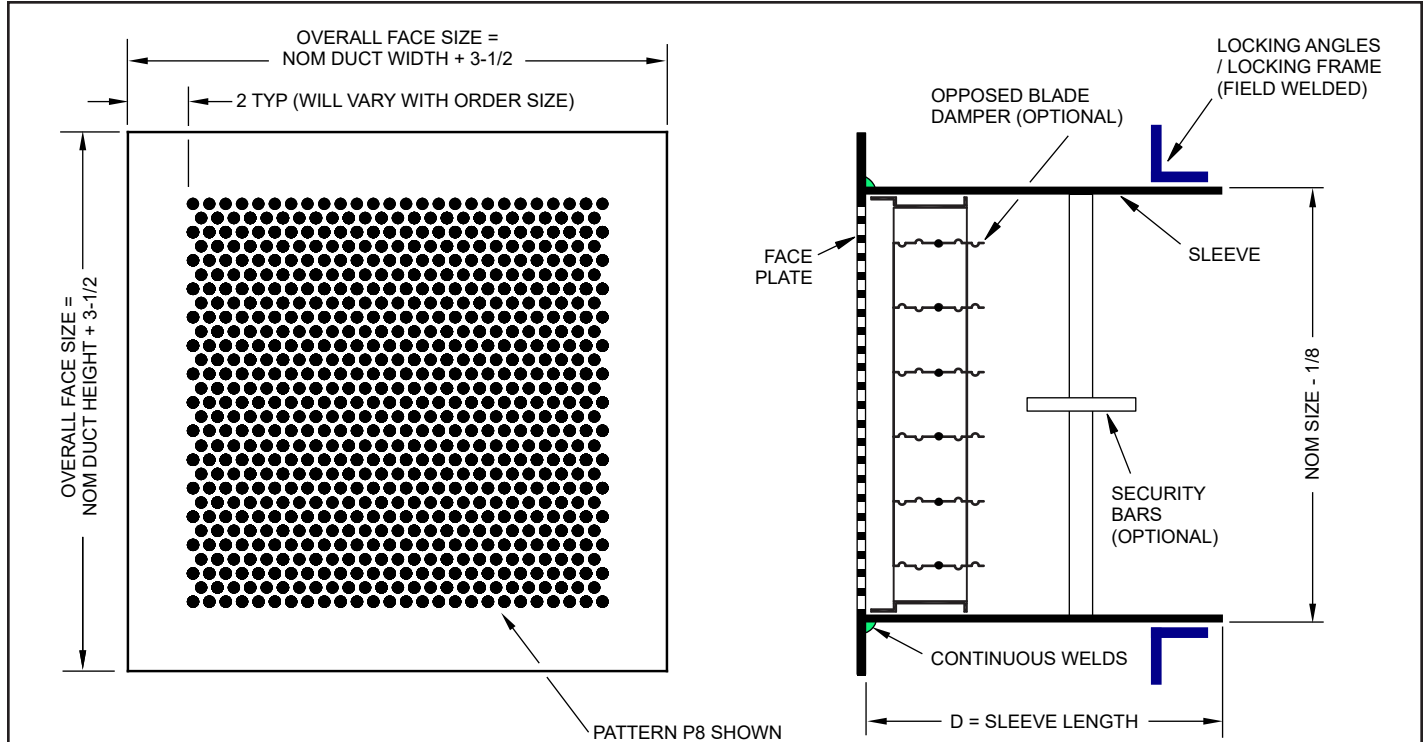

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

## PRODUCT FEATURES

### Face Plate Thickness

- ☐ 3/16" GA. (STANDARD)  
☐ 10 GA. ☐ 12 GA. ☐ 14 GA.  
☐ Other \_\_\_\_\_

### Perforated Hole Pattern

- ☐ (P8) 1/4" Dia. Holes on 3/8" Stg Ctrs (STD)  
☐ (P9) 5/16" Dia. Holes on 7/16" Staggered Ctrs  
☐ (P1) 9/16" Sq. Holes on 11/16" Ctrs.  
☐ (P2) 13/16" Sq. Holes on 1" Centers  
☐ Other \_\_\_\_\_

### Sleeve Thickness

- ☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"  
☐ Other \_\_\_\_\_

### Material

- ☐ Plain Steel (STANDARD) ☐ Aluminum\*  
☐ 304 Stn Stl\* ☐ 316 Stn Stl\* ☐ Galvanized\*  
☐ Other \_\_\_\_\_

\*(Consult factory for availability)

### Finish

All dimensions are in inches.

- ☐ White Powder Coat (STANDARD)  
☐ Rust-Inhibiting Primer  
☐ Other \_\_\_\_\_

### Locking Angle (2 Pieces)

- ☐ 1" x 1" x 3/16" (STANDARD)  
☐ 1-1/2" x 1-1/2" x 3/16"  
☐ 2" x 2" x 3/16"  
☐ Other \_\_\_\_\_

### Locking Frame

- ☐ 1" x 1" x 3/16" (Optional)  
☐ Other \_\_\_\_\_

## OPTIONAL ACCESSORIES

- ☐ Security Bars in Sleeve (see detail sheet)  
☐ Model OB-1 Opposed Blade Damper - Front Operated  
☐ Model OB-1 Opposed Blade Damper - Rear Operated  
☐ Model SRA Square to Round Duct (ships loose)  
☐ Other Options (please specify) \_\_\_\_\_

Q T Y	Order Size (NOM DUCT SIZE)		
	W	H	D

JOB NAME:

SUBMITTED BY: