



Anemostat®

SECURITY AIR DISTRIBUTION


Model **ASTG**

SUBMITTAL SHEET

www.anemostat-hvac.com

SECURITY TRANSFER GRILLE

WELDED FACE PLATES

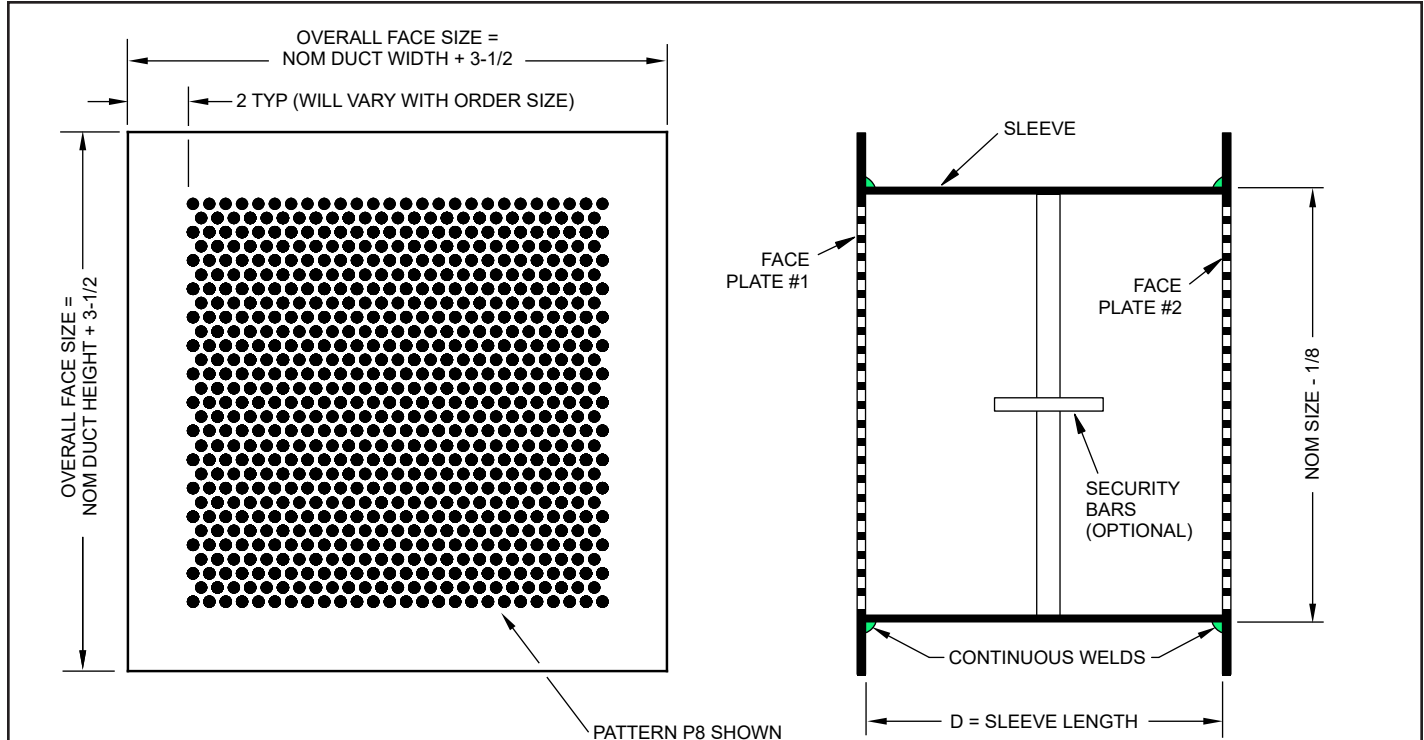

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Face Plate #1 Thickness

- ☐ 3/16" GA. (STANDARD)
☐ 10 GA. ☐ 12 GA. ☐ 14 GA.
☐ Other _____

Face Plate #2 Thickness

- ☐ 3/16" GA. (STANDARD)
☐ 10 GA. ☐ 12 GA. ☐ 14 GA.
☐ Other _____

Perforated Hole Pattern

- ☐ (P8) 1/4" Dia. Holes on 3/8" Stg Ctrs (STD)
☐ (P9) 5/16" Dia. Holes on 7/16" Staggered Ctrs
☐ (P1) 9/16" Sq. Holes on 11/16" Ctrs.
☐ (P2) 13/16" Sq. Holes on 1" Centers
☐ Other _____

Sleeve Thickness

- ☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"
☐ Other _____

Material

All dimensions are in inches.

- ☐ Plain Steel (STANDARD) ☐ Aluminum*
☐ 304 Stn Stl* ☐ 316 Stn Stl* ☐ Galvanized*
☐ Other _____
*(Consult factory for availability)

Finish

- ☐ White Powder Coat (STANDARD)
☐ Rust-Inhibiting Primer
☐ Other _____

OPTIONAL ACCESSORIES

- ☐ Security Bars in Sleeve (see detail sheet)
☐ Other Options (please specify) _____

Q T Y	Order Size (NOM DUCT SIZE)		
	W	H	D

JOB NAME:

SUBMITTED BY: