
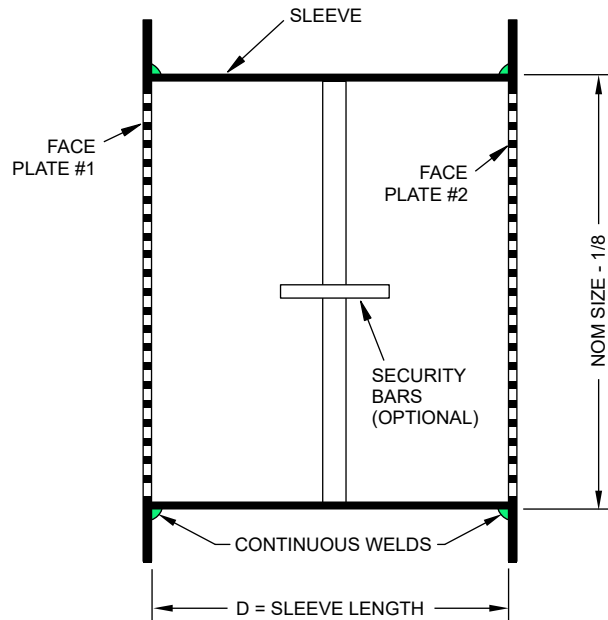


# SUBMITTAL SHEET

**www.anemostat-hvac.com**

## **RISK RESISTANT SECURITY TRANSFER GRILLE**

## WELDED FACE PLATES

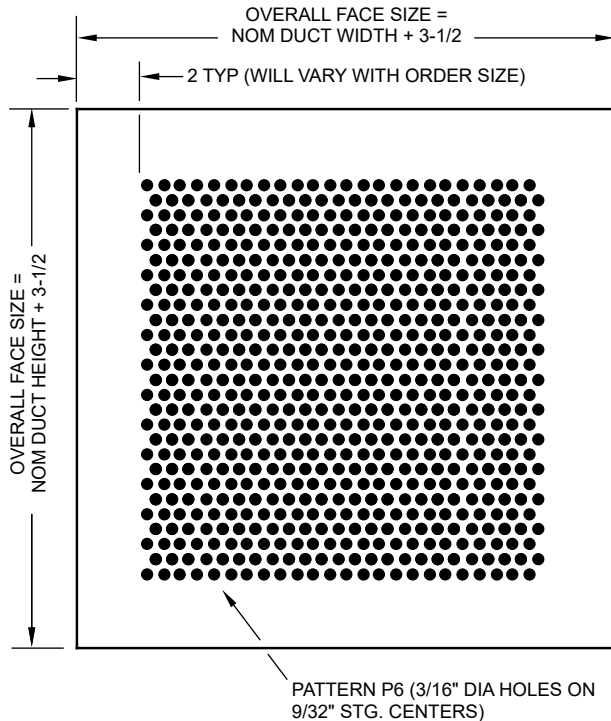

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

## PRODUCT FEATURES

### Face Plate #1 Thickness

- ☐ 3/16" GA. (STANDARD)
- ☐ 10 GA.      ☐ 12 GA.      ☐ 14 GA.
- ☐ Other \_\_\_\_\_

### Face Plate #2 Thickness

- ☐ 3/16" GA. (STANDARD)
- ☐ 10 GA.      ☐ 12 GA.      ☐ 14 GA.
- ☐ Other \_\_\_\_\_

### Perforated Hole Pattern

**(P6) 3/16" Dia.Holes on 9/32" Stg Ctrs (STD)**

### Sleeve Thickness

- ☐ 12 GA. (STD)      ☐ 10 GA.      ☐ 3/16"
- ☐ Other \_\_\_\_\_

## Material

All dimensions are in inches.

- ☐ **Plain Steel (STANDARD)**
☐ Aluminum\*
- ☐ 304 Stn Stl\*
 ☐ 316 Stn Stl\*
 ☐ Galvanized\*
- ☐ Other \_\_\_\_\_
- \*(Consult factory for availability)

## Finish

- ☐ **White Powder Coat (STANDARD)**  
☐ Rust-Inhibiting Primer  
☐ Other

## OPTIONAL ACCESSORIES

- ☐ Security Bars in Sleeve (see detail sheet)
- ☐ Other Options (please specify) \_\_\_\_\_

---



---

QTY

**Order Size**  
(NOM DUCT SIZE)

W	H	D
---	---	---

[illegible]**JOB NAME:**

SUBMITTED BY: