


SUBMITTAL SHEET

www.anemostat-hvac.com

SECURITY TRANSFER GRILLE

REMOVABLE FACE PLATE

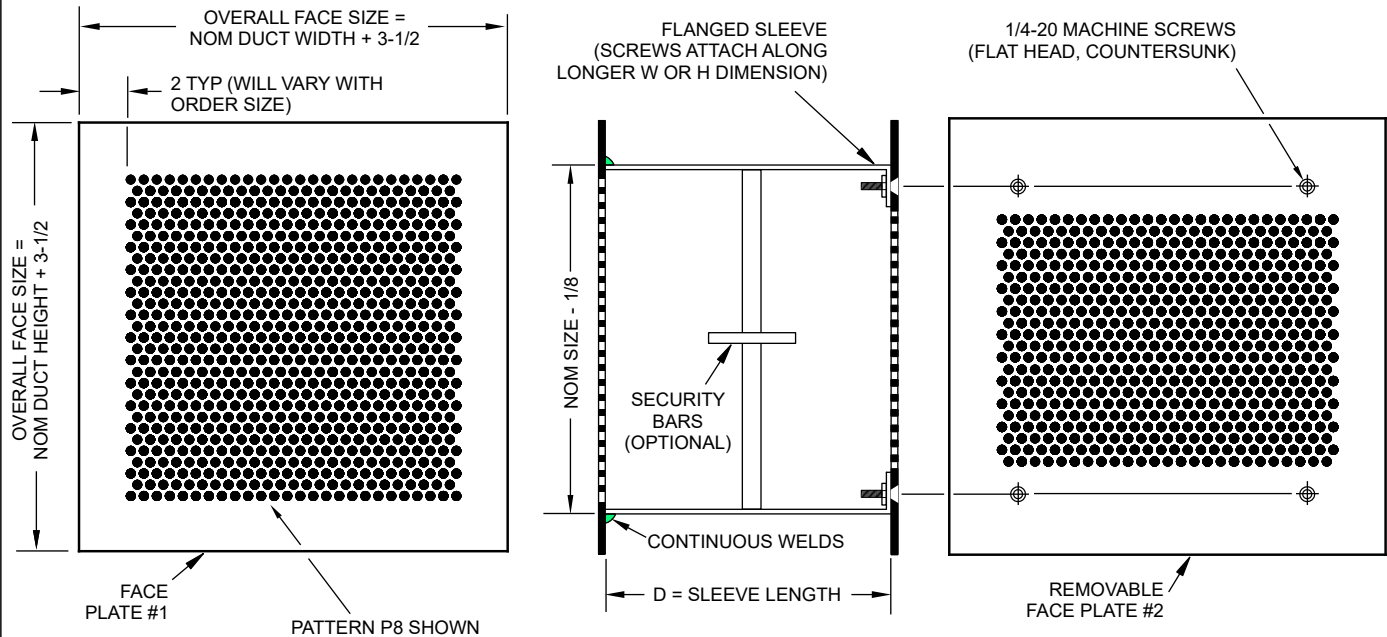

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Face Plate #1 Thickness

- ☐ **3/16" GA. (STANDARD)**
- ☐ 10 GA. ☐ 12 GA. ☐ 14 GA.
- ☐ Other _____

Face Plate #2 Thickness

- ☐ 3/16" GA. (STANDARD) ☐ 10 GA. ☐ 12 GA. ☐ 14 GA.
☐ Other _____

Perf Hole Pattern (Face Plate #1 & #2)

- ☐ (P8) 1/4" Dia. Holes on 3/8" Stg Ctrs (STD)
- ☐ (P9) 5/16" Dia. Holes on 7/16" Staggered Ctrs
- ☐ (P1) 9/16" Sq. Holes on 11/16" Ctrs.
- ☐ (P2) 13/16" Sq. Holes on 1" Centers
- ☐ Other

Sleeve Thickness

- ☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"
- ☐ Other _____

Material

All dimensions are in inches.

- ☐ Plain Steel (STANDARD) ☐ Aluminum*
☐ 304 Stn Stl* ☐ 316 Stn Stl* ☐ Galvanized*
☐ Other _____

*(Consult factory for availability)

Finish

- ☐ **White Powder Coat (STANDARD)**
- ☐ Rust-Inhibiting Primer
- ☐ Other

Machine Screws - 1/4-20

- ☐ PIN-TORX X 3/4" LONG (STANDARD)
☐ Other

OPTIONAL ACCESSORIES

- ☐ Security Bars in Sleeve (see detail sheet)
- ☐ Other Options (please specify) _____

[illegible]**JOB NAME:**

SUBMITTED BY: