

SUBMITTAL SHEET


www.anemostat-hvac.com

Architectural Linear Slot Diffusers

Plaster - Mud Frame / Border

3" Slot Width


PRODUCT FEATURES	CONSTRUCTION DETAILS	MODELS
<ul style="list-style-type: none"> • Pattern / volume controllers field adjusted for horizontal to vertical air discharge directions • Diffuser lengths can be ordered in 1/32" increments • Diffuser end caps factory attached & tap onto diffuser ends • Continuous run applications use multiple diffusers using alignment strips in keyways (included if applicable) • Includes plenum mounting brackets and screws • See Model AD Air Distribution plenums engineered for use with this diffuser (optional) 	<ul style="list-style-type: none"> • Extruded aluminum, adjustable linear slot diffuser Finish: <ul style="list-style-type: none"> <input type="checkbox"/> Arctic White powder coat outer frames and center tees. Black volume / pattern controllers <input type="checkbox"/> Optional Anemostat Color _____ <input type="checkbox"/> Custom Color Match _____ 	<ul style="list-style-type: none"> <input type="checkbox"/> FFBF-300 Supply <input type="checkbox"/> FFRBF-300 Return (Return model excludes Volume / Pattern Controllers)

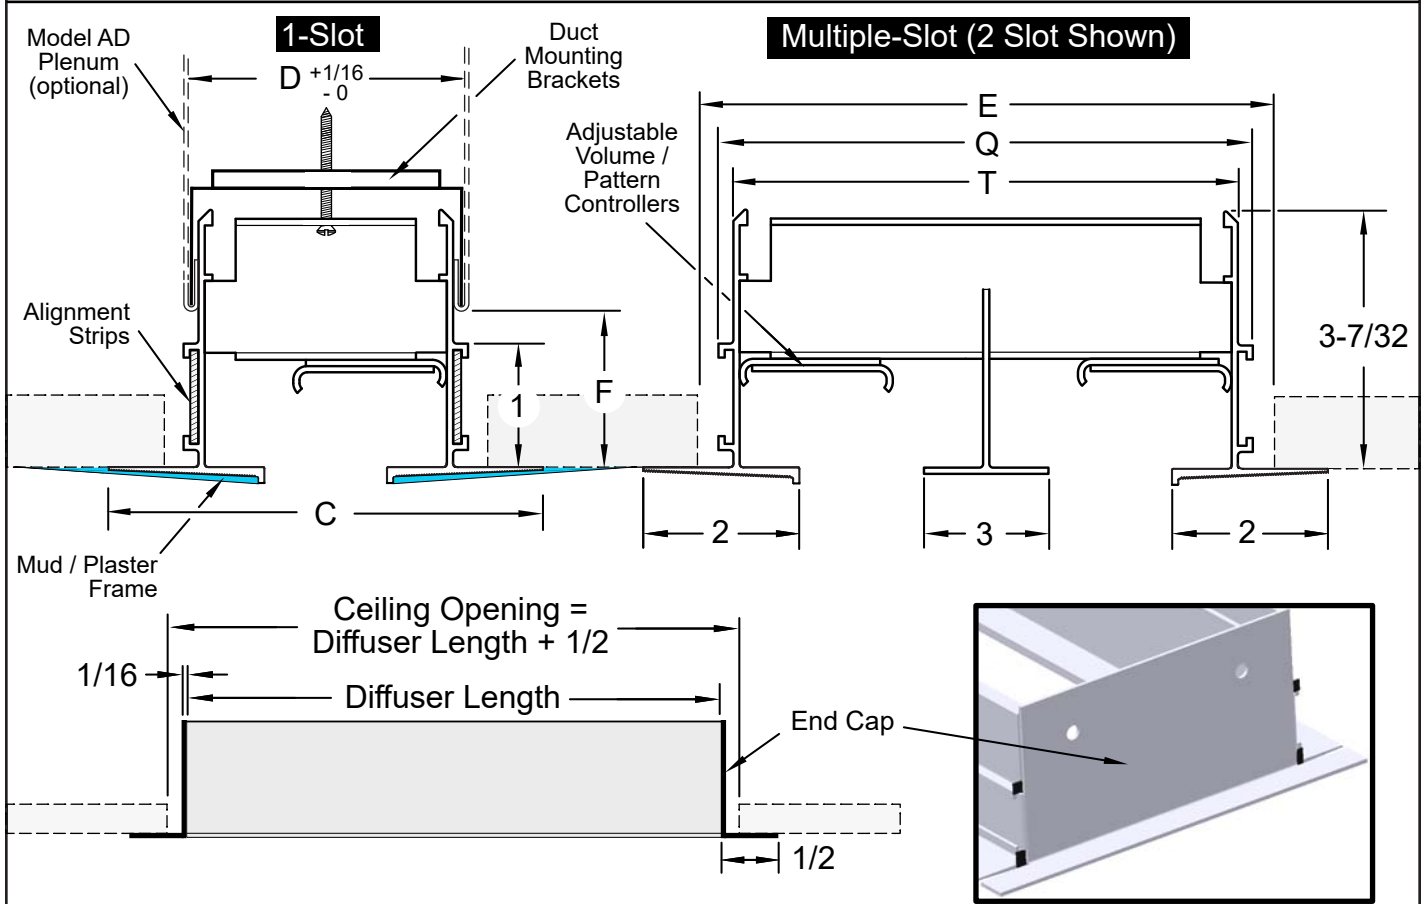

- Diffuser Length = Order Size and is actual cut length of linear diffuser (excludes end caps)
- End caps can be added or removed from the diffuser in the field
- Model AD Pleum Order Length = Model FFBF Order Length

All dimensions are in inches.

Models	Slot Width	# of Slots	E Ceiling Opening	C	D	T	Q	F Range
FFBF-300	3	1	6-3/8	7	6-5/16	6-3/32	6-3/8	2-3/8 to
FFRBF-300		2	12-3/8	13	12-5/16	12-3/32	12-3/8	2-3/4



Recommended Hem Detail
(Duct must be hemmed to use mounting brackets)

JOB NAME:

SUBMITTED BY: