

SUBMITTAL SHEET

www.anemostat-hvac.com

FREE FLO CURVED ARCHITECTURAL SLOT DIFFUSERS

CONCAVE (V) APPLICATIONS

PRODUCT FEATURES

- Installed on **CONCAVE** ceilings / walls / surfaces
- Field adjustable pattern controllers to change air discharge direction from horizontal to vertical projection (no integral volume control)
- Any single piece assembly must have a constant radius (Rc)
- Diffusers with arc lengths greater than 120" will be provided with center and / or end sections
- Refer to the applicable Free Flo submittal sheets for dimensional details, border type, ceiling opening requirements
- Can be used for supply or return applications
- Contact factory for other configurations not shown - slot width, # slots, frame type
- Opening Arc Length = Diffuser Arc Length + 1/2"


MODELS

Surface Frame (S)


- FF-C-S-10-1-V 1" Slot Width, 1 Slot
- FF-C-S-10-2-V 1" Slot Width, 2 Slots
- FF-C-S-15-1-V 1-1/2" Slot Width, 1 Slot
- FF-C-S-15-2-V 1-1/2" Slot Width, 2 Slots

Plaster / Mud Frame (BF)

- FF-C-BF-10-1-V 1" Slot Width, 1 Slot
- FF-C-BF-10-2-V 1" Slot Width, 2 Slots
- FF-C-BF-15-1-V 1-1/2" Slot Width, 1 Slot
- FF-C-BF-15-2-V 1-1/2" Slot Width, 2 Slots

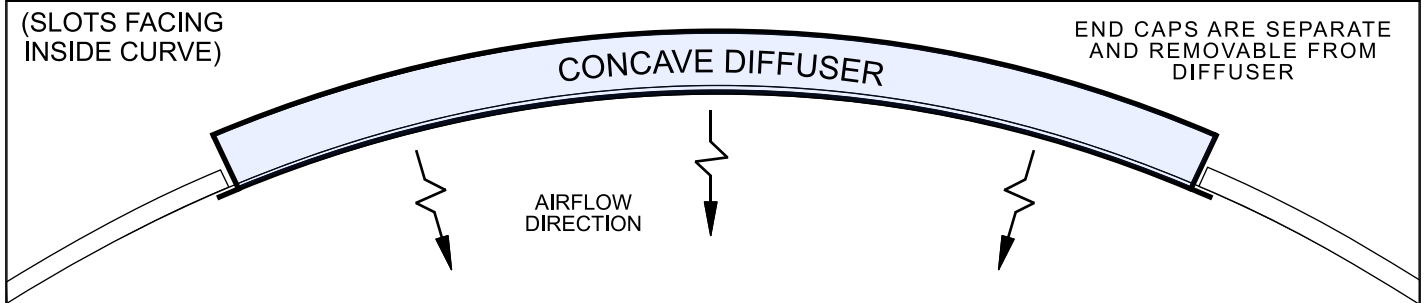

HOW TO SPECIFY CONCAVE **DIFFUSER** DIMENSIONS

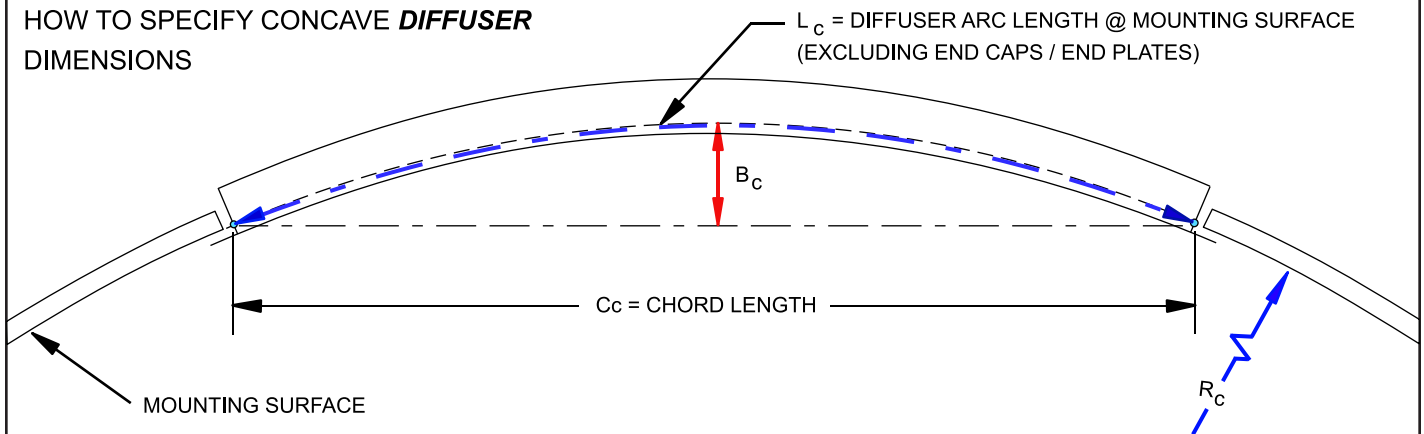

DIFFUSER DIMENSIONS

TAG:	Arc Length	Chord Length	Radius	Rise	Angle
	L_c	C_c	R_c	B_c	A_c

IMPORTANT: ONLY 2 OF THE 5 DIMENSIONS SHOWN ARE REQUIRED TO DEFINE DIFFUSER CURVATURE

All dimensions are in inches.

JOB NAME:

SUBMITTED BY:




SUBMITTAL SHEET

www.anemostat-hvac.com

CALCULATING CURVING DIMENSIONS

DIFFUSER DIMENSIONS	IF YOU KNOW:
Any 2 of the following 5 dimensions define the required curving for the diffuser. These dimensions reference the diffuser:	
<u>Example:</u>	
Lc = ARC Length	Lc = 102.64"
Rc = RADIUS	Rc = 130.00"
Cc = CHORD Length (< Diameter)	Cc = 100.00"
Bc = RISE	Bc = 10"
Ac = ANGLE, degrees	Ac = 45.24°
	Cc & Bc : $R = (C^2 + 4B^2) / (8B)$ $A = 2 \times \text{Arcsin}(C/2R)$ $L = .017453 \times R \times A$
	Lc & Rc : $A = 57.296 \times L / R$ $C = 2 \times R \times \text{Sin}(A/2)$
	Lc & Ac : $R = L / (.017453 \times A)$ $C = 2 \times R \times \text{Sin}(A/2)$
	Cc & Rc : $A = 2 \times \text{Arcsin}(C/2R)$ $L = .017453 \times R \times A$

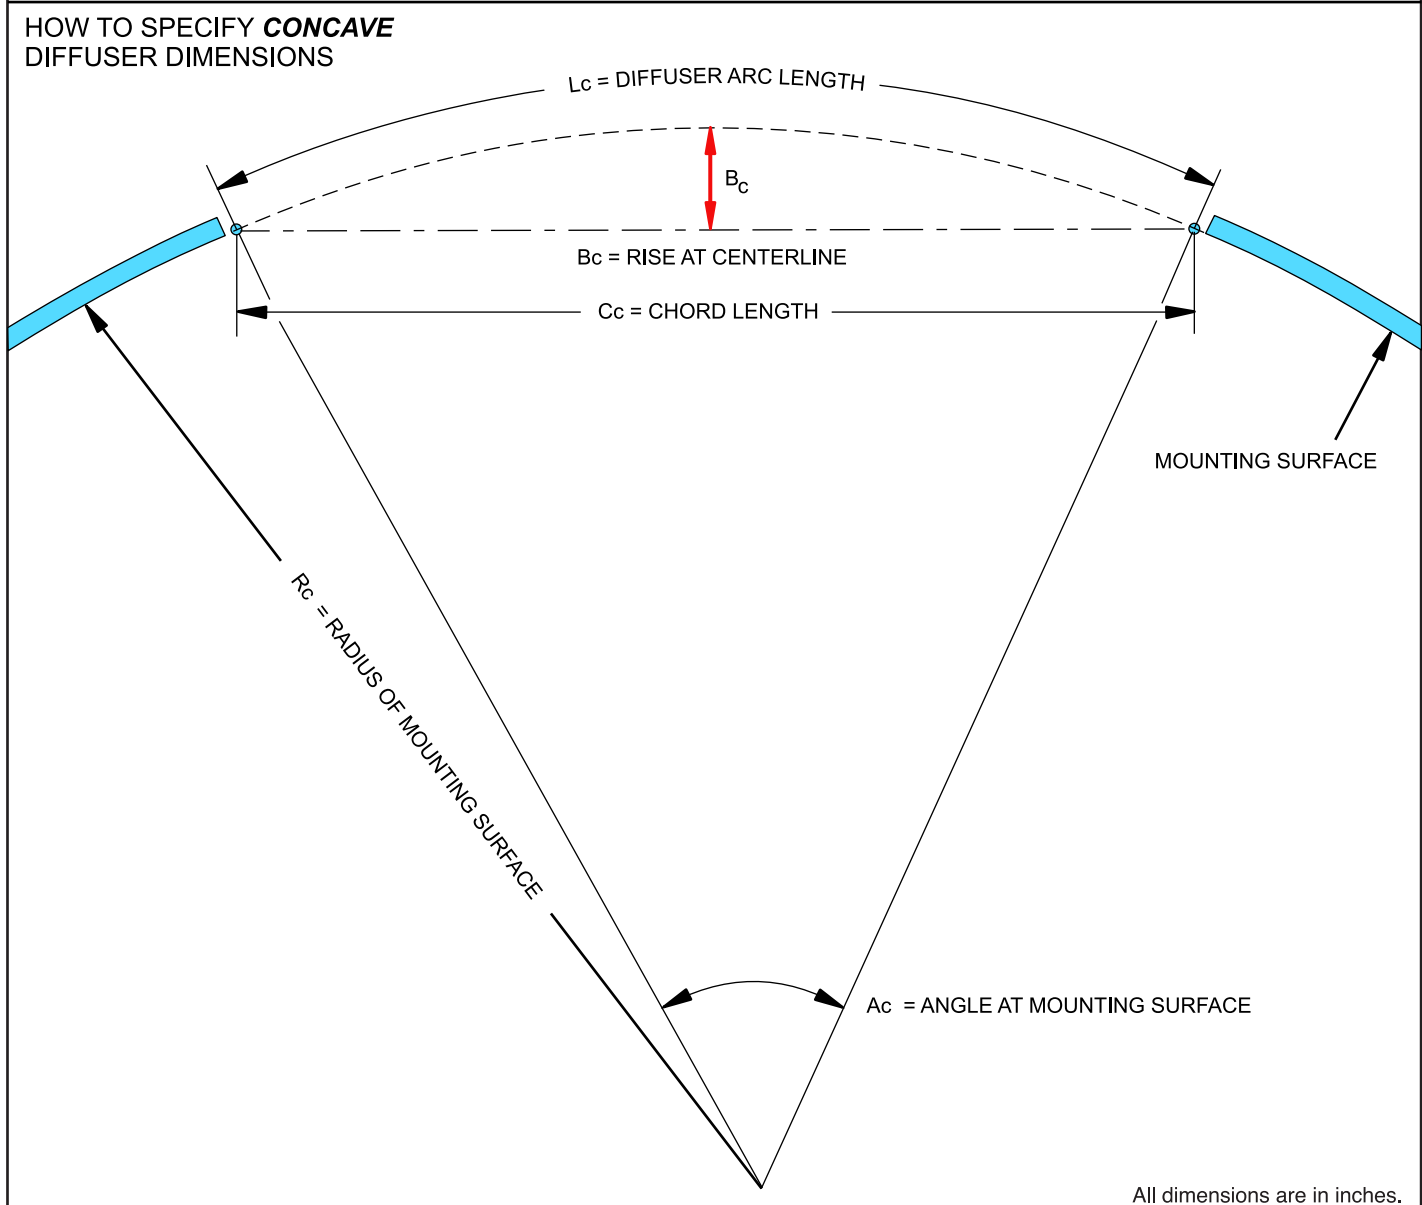

All dimensions are in inches.


JOB NAME: _____ **SUBMITTED BY:** _____

SUBMITTAL SHEET

www.anemostat-hvac.com

**FREE FLO CURVED DIFFUSERS
CONCAVE (V) APPLICATIONS**

CEILING OPENING DIMENSIONS

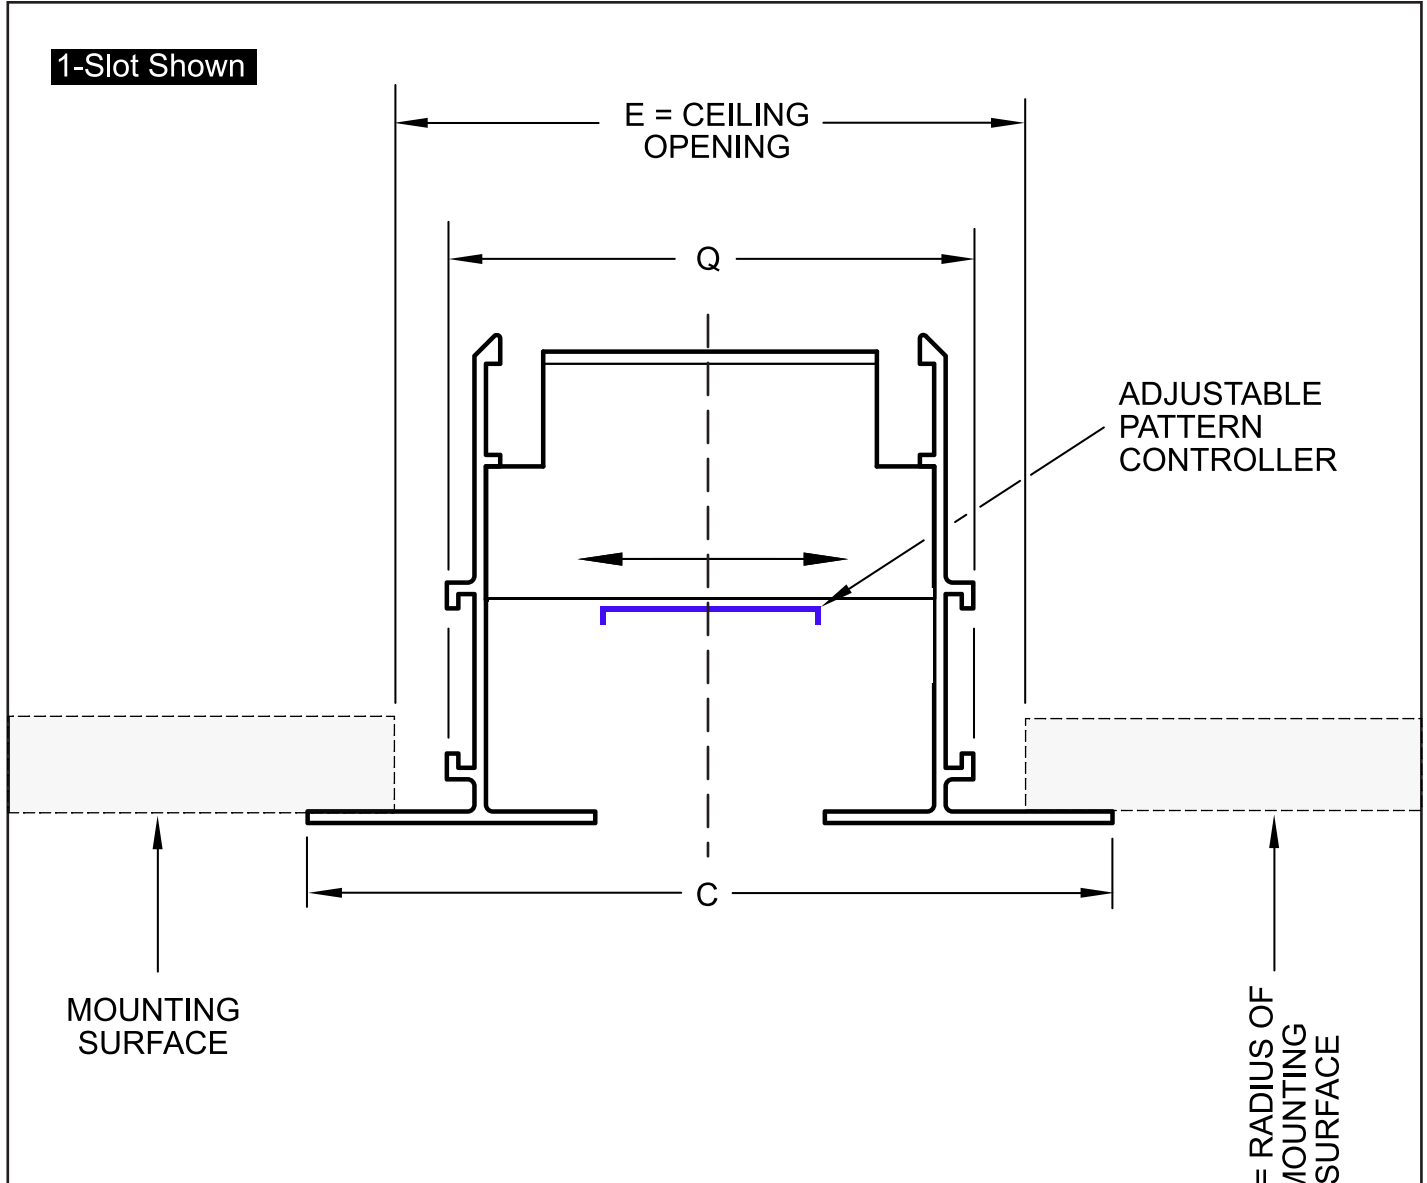

MODELS	SLOT WIDTH	# SLOTS	C	E	Q
FF-C-S-V (SURFACE FRAME)	1"	1	3-1/2	2-3/8	2-9/32
		2	5-1/2	4-3/8	4-9/32
FF-C-BF-V (PLASTER / MUD FRAME)	1-1/2"	1	4-1/2	3-3/8	3-9/32
		2	7-1/2	6-3/8	6-9/32
	2"	1	5-1/2	4-3/8	4-11/32
		2	9-1/2	8-3/8	8-11/32

Contact factory for other slot widths and quantity of slots.

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: