
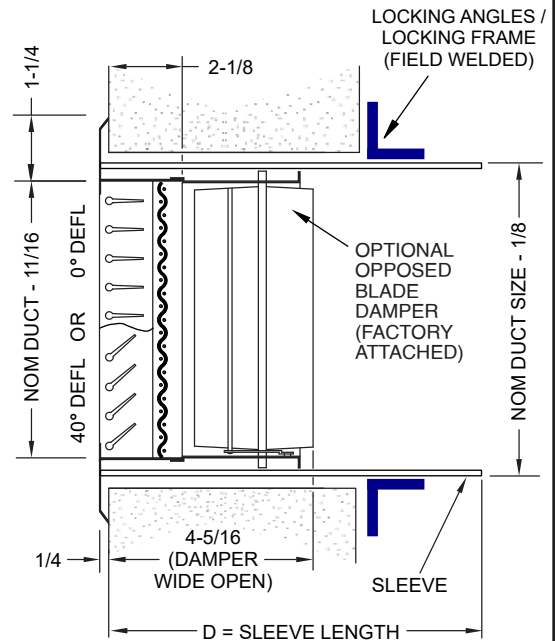


# SUBMITTAL SHEET

**www.anemostat-hvac.com**

**HEAVY DUTY SECURITY GRILLE**  
**FIXED LOUVERS • 1/2" SPACING**

**LONG BLADES (L) & 0°  
DEFLECTION SHOWN BELOW**

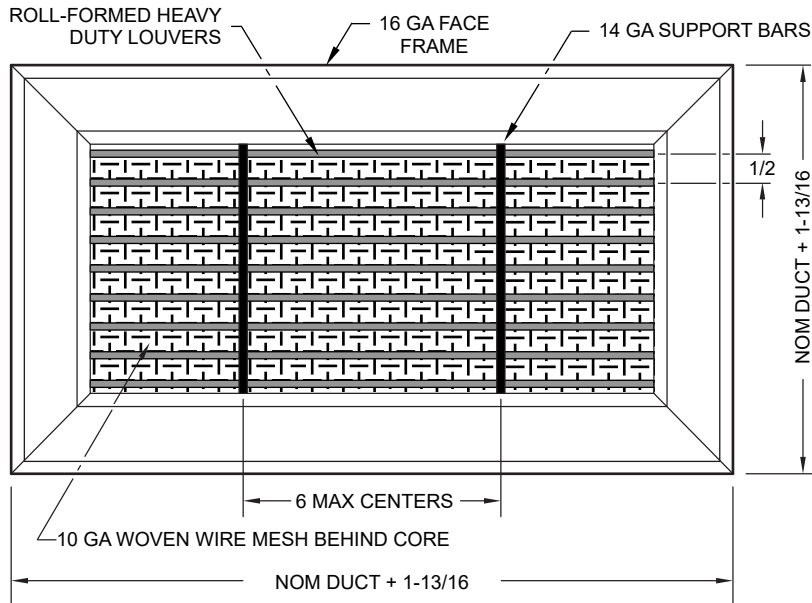

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

## PRODUCT FEATURES

## Face Frame

☐ 16 GA. (STANDARD) ☐ 14 GA.

**Sleeve**

☐ 14 GA. (STANDARD)    ☐ 16 GA.    ☐ 18 GA.  
☐ Other

### Fixed Louver Deflection Angle

☐ 0° Deflection      ☐ 40° Deflection

**Louver Direction (Based on W x H)**

☐ Long (Louvers Parallel to Long Dimension)  
☐ Short (Louvers Parallel to Short Dimension)  
☐ NA (Square Sizes)

**Woven Wire Mesh - 10 Ga**

☐ 1/2" Square Holes on 5/8" Centers (STD)  
☐ 3/8" Square Holes on 1/2" Centers

## Material

☐ Plain Steel (STANDARD)    ☐ Aluminum\*  
☐ 304 Stn Stl\*    ☐ 316 Stn Stl\*    ☐ Galvanized\*  
☐ Other

\*(Consult factory for availability)

## Finish

☐ **White Powder Coat (STANDARD)**☐ Rust-Inhibiting Primer☐ Other

### Locking Angle (2 Pieces)

☐ 1" x 1" x 3/16" (STANDARD)

☐ 1-1/2" x 1-1/2" x 3/16"      ☐ 2" x 2" x 3/16"

☐ Other

### Locking Frame

☐ 1" x 1" x 3/16" (Optional)

☐ Other

## OPTIONAL ACCESSORIES

☐ Model OB-1 Opposed Blade Damper - Front Operated

☐ Model OB-1 Opposed Blade Damper - Rear Operated

☐ Model SRA Square to Round Duct  
(ships loose)

☐ Other Options (please specify)

All dimensions are in inches.

[illegible]**JOB NAME:**

SUBMITTED BY: