



Anemostat®

SECURITY AIR DISTRIBUTION

Model **RRFP**

SECURITY FACE PLATE


RISK RESISTANT

CALIFORNIA TITLE 24 COMPLIANT

NATIONAL INSTITUTE OF CORRECTIONS COMPLIANT

SUBMITTAL SHEET

www.anemostat-hvac.com

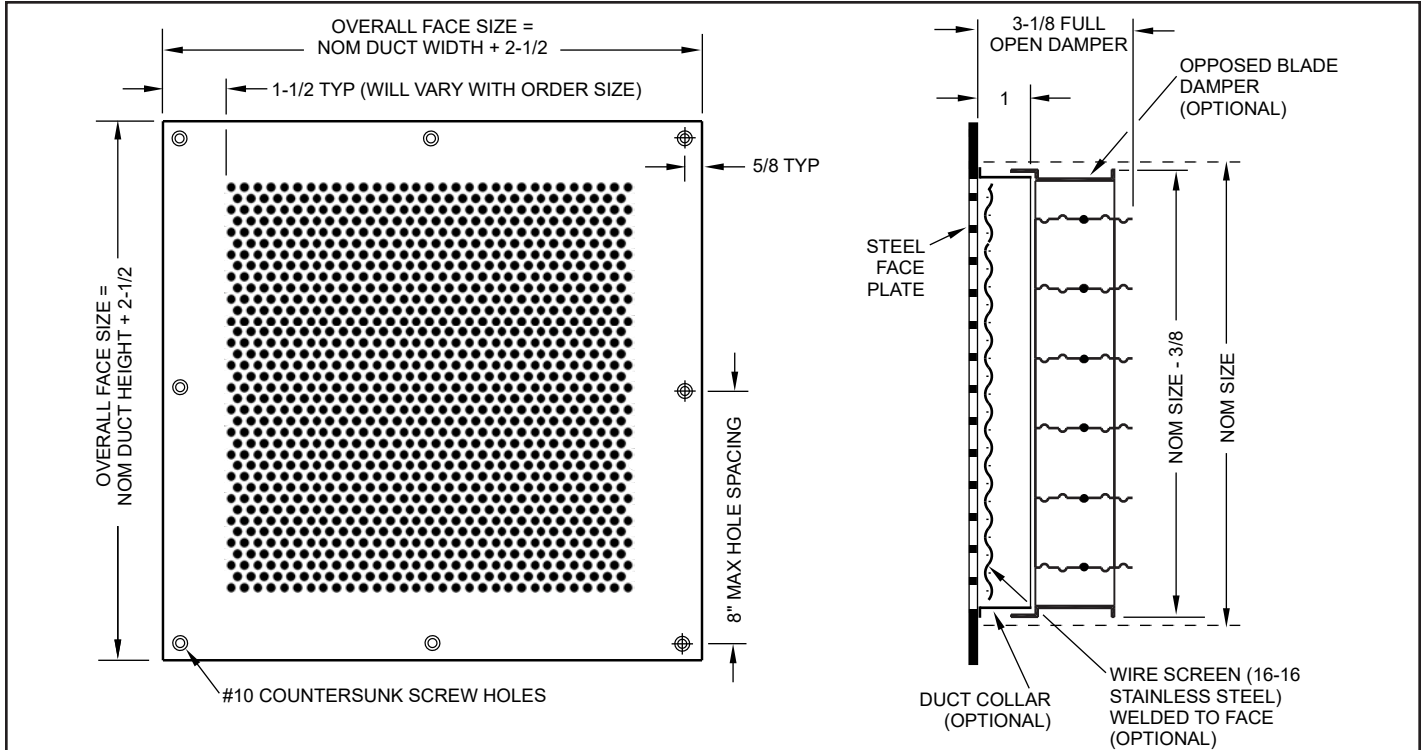

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

All dimensions are in inches.

Thickness

- 12 Gauge (STANDARD)
- 3/16" (12 GA + 14 GA Welded Composite)
- 14 Gauge
- Other _____

Perforated Hole Pattern

- (P5) 5/32" Dia. Holes on 7/32" Stg. Ctrs (STD)
- (P6) 3/16" Dia. Holes on 9/32" Stg. Centers

Material

- Plain Steel (STANDARD)
- 304 Stainless Steel* 316 Stainless Steel*
- Aluminum* Galvanized*
- Other _____

*(Consult factory for availability)

Overall Face Size (Nom Duct +)

- 2-1/2" (STANDARD) 3-1/2" 2"

Finish

- White Powder Coat (STANDARD)
- Rust-Inhibiting Primer
- Other _____

Tamper-Proof Screws

- #10 x 1-1/2" Pinned Flat Head Torx Sheet Metal Screws (STANDARD)
- #10-32 x 1-1/2" Pinned Flat Head Torx Machine Screws
- No Screw Holes / No Screws
- Other _____

OPTIONAL ACCESSORIES

- Model OB-1 Opposed Blade Damper - Front Operated
- Model OB-1 Opposed Blade Damper - Rear Operated
- Duct Collar (20 Ga) - Standard with OB-1 Damper
- Model SRA Square to Round Duct Adapter (ships loose)
- Wire Screen (16-16 Stainless Steel)
- Other Options (please specify)

Q T Y	Order Size (NOM DUCT SIZE)	
	W	H

JOB NAME:

SUBMITTED BY: