


# SUBMITTAL SHEET

**www.anemostat-hvac.com**

## RISK-RESISTANT SECURITY GRILLE

**LOUVERED • HEAVY DUTY**

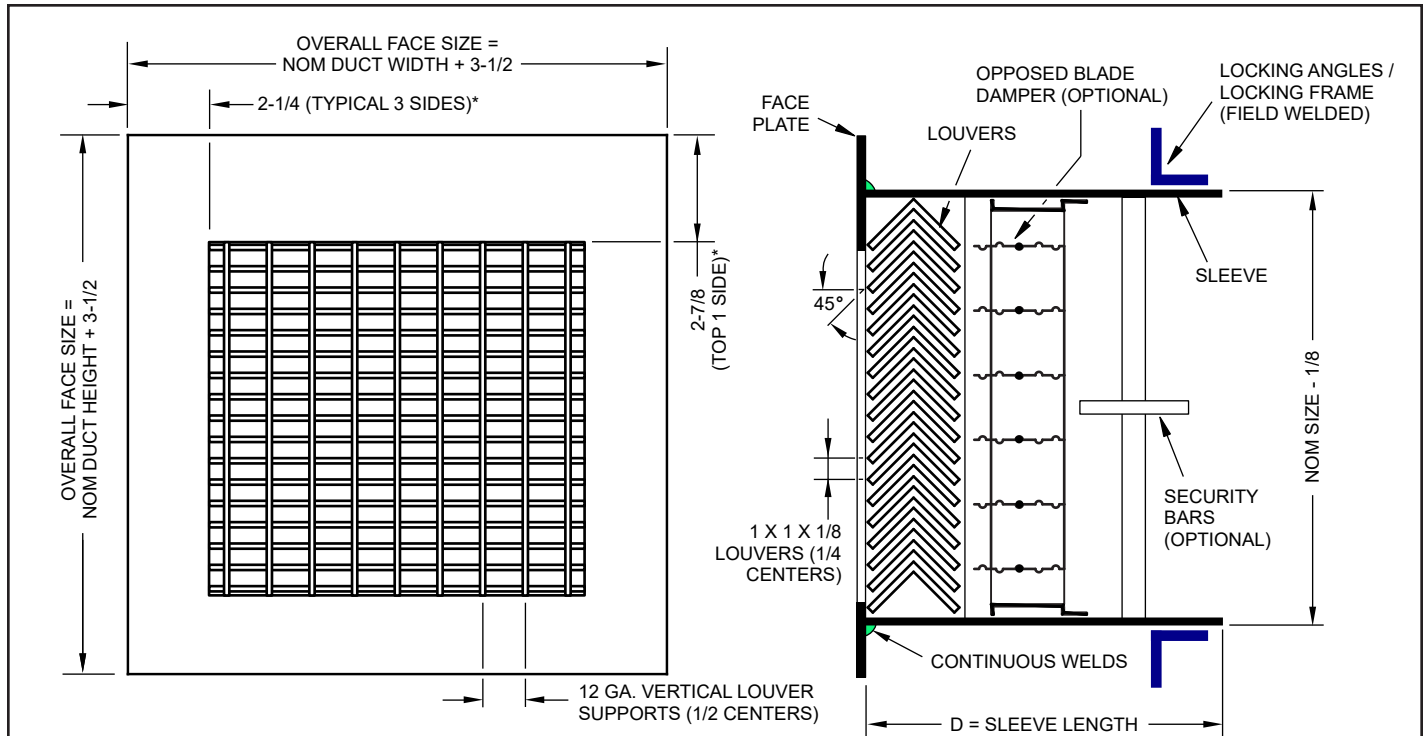

\* ACTUAL BORDER DIMENSION MAY VARY BASED ON ORDER SIZE

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

## PRODUCT FEATURES

### Face Plate Thickness

- ☐ 3/16" GA. (STANDARD)
- ☐ 10 GA.                      ☐ 12 GA.
- ☐ Other \_\_\_\_\_

## Sleeve Thickness

- ☐ 12 GA. (STD)      ☐ 10 GA.      ☐ 3/16"
- ☐ Other

## Material

- ☐ Plain Steel (STANDARD)      ☐ Aluminum\*  
☐ 304 Stn Stl\*    ☐ 316 Stn Stl\*    ☐ Galvanized\*  
☐ Other \_\_\_\_\_

\*(Consult factory for availability)

## Finish

- ☐ **White Powder Coat (STANDARD)**  
☐ Rust-Inhibiting Primer  
☐ Other \_\_\_\_\_

### Locking Angle (2 Pieces)

- ☐ 1" x 1" x 3/16" (STANDARD)  
☐ 1-1/2" x 1-1/2" x 3/16"  
☐ 2" x 2" x 3/16"  
☐ Other

## Locking Frame

- ☐ 1" x 1" x 3/16" (Optional)  
☐ Other \_\_\_\_\_

## OPTIONAL ACCESSORIES

- ☐ Security Bars in Sleeve (see detail sheet)
- ☐ Anchoring Studs - Nelson Type (see detail sheet)
- ☐ Model OB-1 Opposed Blade Damper - Rear Operated
- ☐ Model SRA Square to Round Duct (ships loose)
- ☐ Other Options (please specify)

---



---

All dimensions are in inches.

[illegible]

All dimensions are in inches.

**JOB NAME:**

**SUBMITTED BY:**