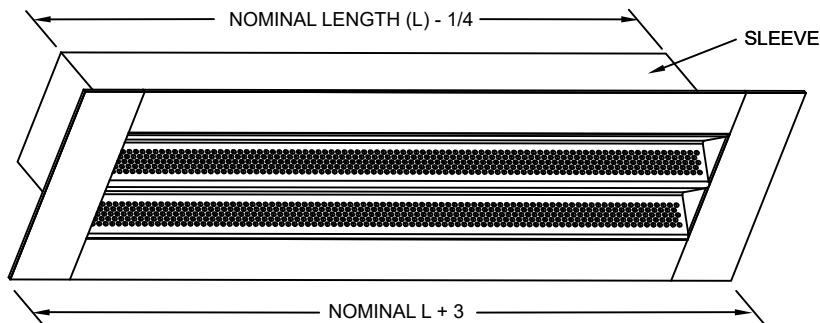
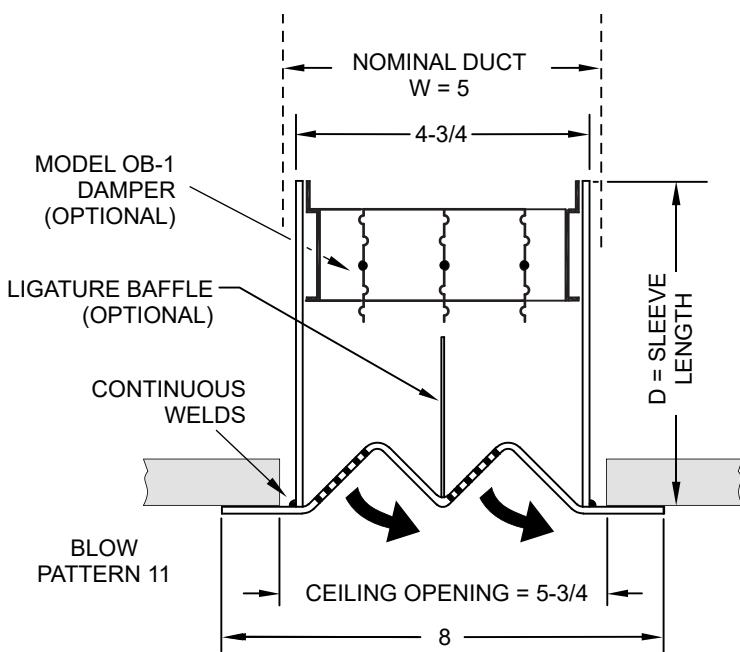



**Anemostat®**

SECURITY AIR DISTRIBUTION

SUBMITTAL SHEET

www.anemostat-hvac.com

Model **RRPL-P19****LINEAR SECURITY DIFFUSER****RISK RESISTANT PERFORATED FACE****1-WAY HORIZONTAL BLOW PATTERN (11)****FACE SCREW HOLES & SCREWS (S1)****REAR AUXILIARY MOUNTING FRAME (FM)****LOCKING ANGLES / FRAME (LA)****IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention.**California Title 24 & National Institute of Corrections Compliant for Suicide Resistance****PRODUCT FEATURES****Perforated Hole Pattern**

(P19) 1/8" Ø Holes on 3/16" Stg. Ctrs (STD)

Face Plate Thickness

12 Gauge Steel (STD)

Sleeve Thickness

12 Gauge Steel (STD)

Finish White Powder Coat (STANDARD) Rust-Inhibiting Primer Other _____**INSTALLATION OPTIONS**

Face Screw Holes & Screws (Tamper-Proof #10 x 1-1/2" Flat Head Pin-Torx)
 Rear Auxiliary Installation Frame - includes face screw holes and screws (FM)

Locking Angles / Frame

1" x 1" x 3/16" (2 Pieces - Nom Length)
 1" x 1" x 3/16" (Locking Frame)
 Other _____

OPTIONAL ACCESSORIES

Ligature Baffle
 Model OB-1 Opposed Blade Damper - Rear Operated (Sleeve D = 4" Minimum)
 Model AD Engineered Plenum
 Other Options _____

All dimensions are in inches.

JOB NAME:**SUBMITTED BY:**