



# Anemostat®

SECURITY AIR DISTRIBUTION

## SUBMITTAL SHEET


www.anemostat-hvac.com

Model **RRPL-P19**

**LINEAR SECURITY DIFFUSER**

**RISK RESISTANT PERFORATED FACE**

**2-WAY HORIZONTAL BLOW PATTERN (21)**

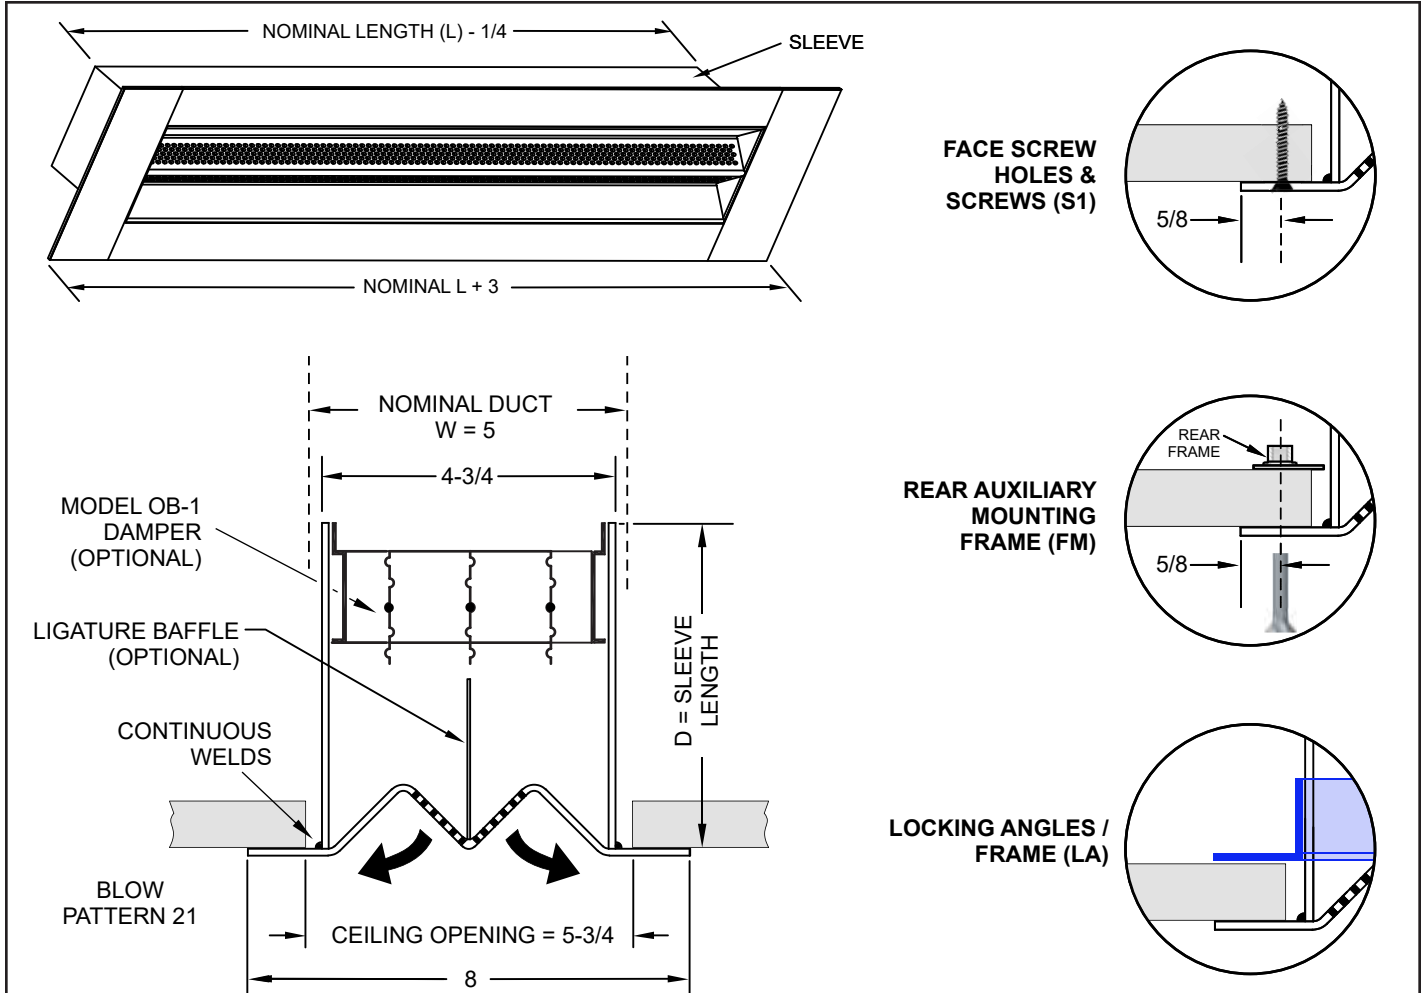

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

**California Title 24 & National Institute of Corrections Compliant for Suicide Resistance**

### PRODUCT FEATURES

#### Perforated Hole Pattern

(P19) 1/8" Ø Holes on 3/16" Stg. Ctrs (STD)

#### Face Plate Thickness

12 Gauge Steel (STD)

#### Sleeve Thickness

12 Gauge Steel (STD)

#### Finish

☐ White Powder Coat (STANDARD)

☐ Rust-Inhibiting Primer

☐ Other \_\_\_\_\_

### INSTALLATION OPTIONS

☐ Face Screw Holes & Screws (Tamper-Proof #10 x 1-1/2" Flat Head Pin-Torx)

☐ Rear Auxiliary Installation Frame - includes face screw holes and screws (FM)

#### Locking Angles / Frame

☐ 1" x 1" x 3/16" (2 Pieces - Nom Length)

☐ 1" x 1" x 3/16" (Locking Frame)

☐ Other \_\_\_\_\_

### OPTIONAL ACCESSORIES

☐ Ligature Baffle

☐ Model OB-1 Opposed Blade Damper - Rear Operated (Sleeve D = 4" Minimum)

☐ Model AD Engineered Plenum

☐ Other Options \_\_\_\_\_

Q  
T  
Y

**Order Size**  
(NOM DUCT SIZE)

**NOM L**

**D**

All dimensions are in inches.

**JOB NAME:**

**SUBMITTED BY:**