



Anemostat®


SECURITY AIR DISTRIBUTION

SUBMITTAL SHEET

www.anemostat-hvac.com

Model **RRPL-P19**

LINEAR SECURITY DIFFUSER
RISK RESISTANT PERFORATED FACE
COMBO HORIZONTAL-VERTICAL
BLOW PATTERN (25)

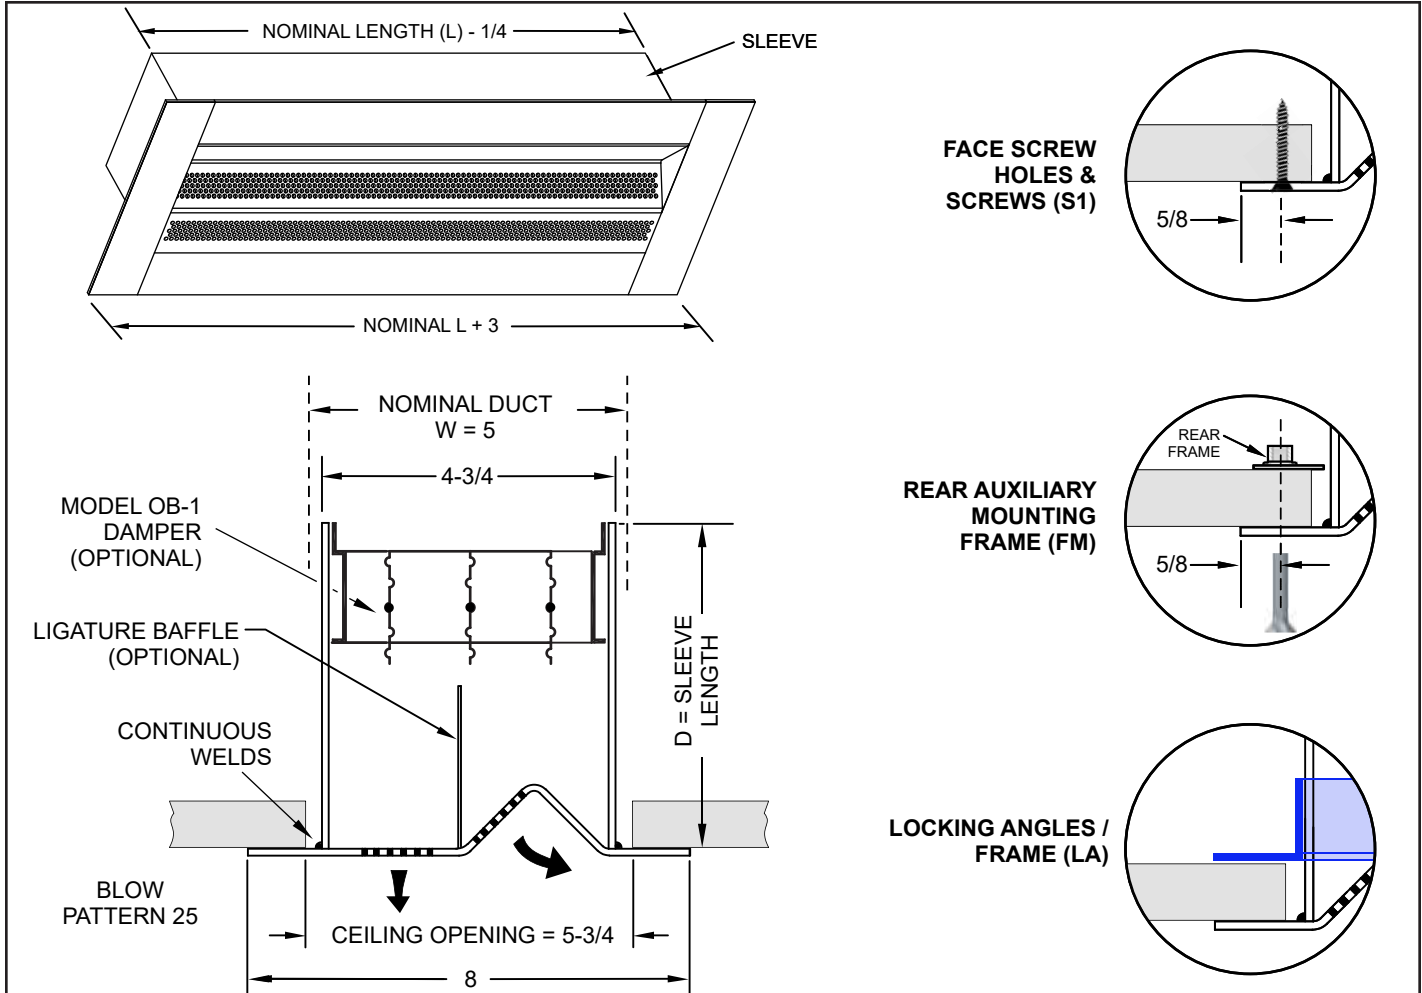

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

California Title 24 & National Institute of Corrections Compliant for Suicide Resistance

PRODUCT FEATURES

Perforated Hole Pattern

(P19) 1/8" Ø Holes on 3/16" Stg. Ctrs (STD)

Face Plate Thickness

12 Gauge Steel (STD)

Sleeve Thickness

12 Gauge Steel (STD)

Finish

☐ White Powder Coat (STANDARD)

☐ Rust-Inhibiting Primer

☐ Other _____

INSTALLATION OPTIONS

☐ Face Screw Holes & Screws (Tamper-Proof #10 x 1-1/2" Flat Head Pin-Torx)

☐ Rear Auxiliary Installation Frame - includes face screw holes and screws (FM)

Locking Angles / Frame

☐ 1" x 1" x 3/16" (2 Pieces - Nom Length)

☐ 1" x 1" x 3/16" (Locking Frame)

☐ Other _____

OPTIONAL ACCESSORIES

☐ Ligature Baffle

☐ Model OB-1 Opposed Blade Damper - Rear Operated (Sleeve D = 4" Minimum)

☐ Model AD Engineered Plenum

☐ Other Options _____

Q T Y	Order Size (NOM DUCT SIZE)	
	NOM L	D

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: