


SUBMITTAL SHEET

www.anemostat-hvac.com

**LIGATURE RESISTANT SECURITY
GRILLE W/ FACE SCREW HOLES**

**APPROVED BY NY STATE OFFICE OF
MENTAL HEALTH**

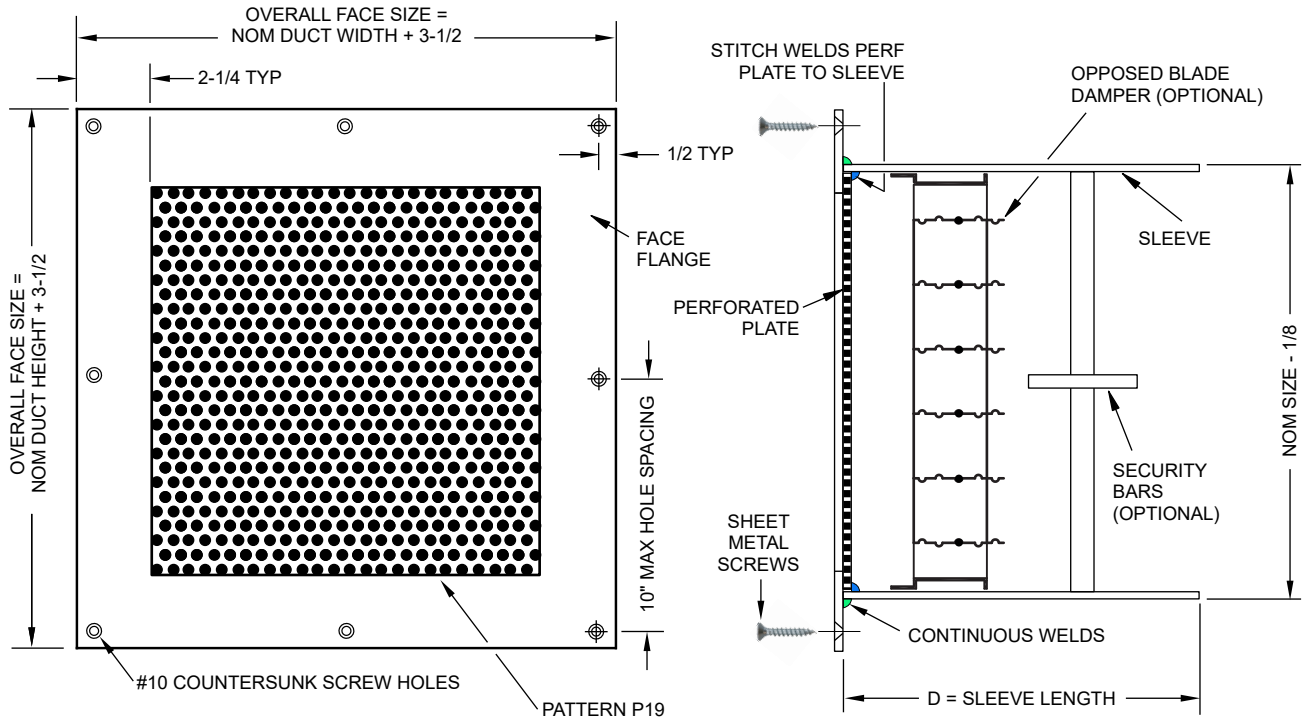

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Perforated Hole Pattern

(P19) 1/8" Dia. Holes on 3/16" Stg. Ctrs (STD)

Material & Thickness

- ☐ Steel (10 Ga Face Flange / 11 Ga Perf Plate)
- ☐ 304 Stainless Stl (14 Ga Face Flange & Perf Plate)
- ☐ Aluminum (1/8" Face Flange & Perf Plate)

Sleeve Thickness

- ☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"
- ☐ Other _____

Finish

- ☐ **White Powder Coat (STANDARD)**
☐ Satin Polish Finish (Stn Steel Only)
☐ Rust-Inhibiting Primer
☐ Other _____

Tamper-Proof Screws

- ☐ **#10 x 1-1/2" Pinned Flat Head Torx Sheet Metal Screws (STANDARD)**
- ☐ #10-32 x 1-1/2" Pinned Flat Head Torx Machine Screws
- ☐ No Screw Holes / No Screws
- ☐ Other

OPTIONAL ACCESSORIES

- ☐ Security Bars in Sleeve (see detail sheet)
- ☐ Model OB-1 Opposed Blade Damper - Front Operated (Requires oversized hole in perforated plate for damper access)
- ☐ Model OB-1 Opposed Blade Damper - Rear Operated
- ☐ Other Options (please specify)

[illegible]

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: