



Anemostat®

SECURITY AIR DISTRIBUTION


SUBMITTAL SHEET

www.anemostat-hvac.com

Model **RRSG-P19**

**LIGATURE RESISTANT SECURITY
GRILLE W/ LOCKING ANGLES/FRAMES**

**APPROVED BY NY STATE OFFICE OF
MENTAL HEALTH**

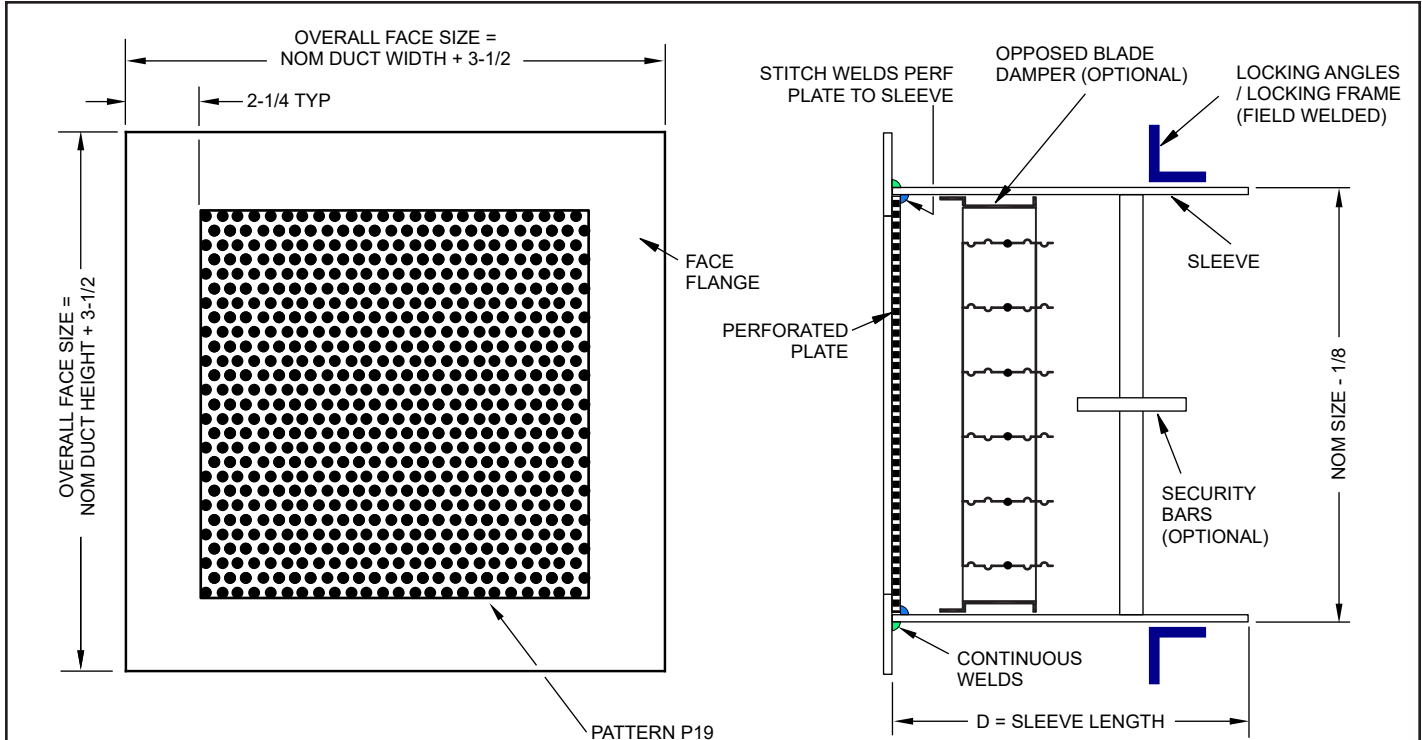

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Perforated Hole Pattern

(P19) 1/8" Dia. Holes on 3/16" Stg. Ctrs (STD)

Material & Thickness

- ☐ Steel (10 Ga Face Flange / 11 Ga Perf Plate)
☐ 304 Stainless Stl (14 Ga Face Flange & Perf Plate)
☐ Aluminum (1/8" Face Flange & Perf Plate)

Sleeve Thickness

- ☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"
☐ Other _____

Finish

- ☐ White Powder Coat (STANDARD)
☐ Satin Polish Finish (Stn Steel Only)
☐ Rust-Inhibiting Primer
☐ Other _____

Locking Angle (2 Pieces)

- ☐ 1" x 1" x 3/16" (STANDARD)
☐ 1-1/2" x 1-1/2" x 3/16"
☐ 2" x 2" x 3/16"
☐ Other _____

Locking Frame

- ☐ 1" x 1" x 3/16" (Optional)
☐ Other _____

OPTIONAL ACCESSORIES

- ☐ Security Bars in Sleeve (see detail sheet)
☐ Model OB-1 Opposed Blade Damper - Front Operated (Requires oversized hole in perforated plate for damper access)
☐ Model OB-1 Opposed Blade Damper - Rear Operated
☐ Other Options (please specify)

All dimensions are in inches.

JOB NAME:

SUBMITTED BY:

Q T Y	Order Size (NOM DUCT SIZE)		
	W	H	D