


LIGATURE RESISTANT SECURITY GRILLE W/ REAR MOUNTING FRAME

APPROVED BY NY STATE OFFICE OF **MENTAL HEALTH**

www.anemostat-hvac.com

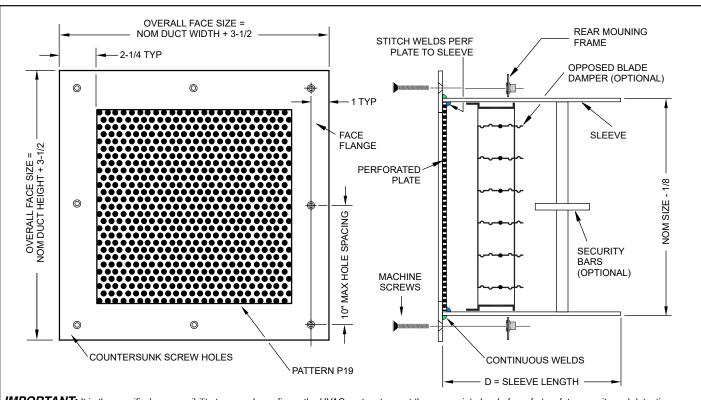

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES Perforated Hole Pattern		Q T	Order Size		
(P19) 1/8" Dia. Holes on 3/16" Stg. Ctrs (STD)	Tamper-Proof Screws	Y	w	Н	D
Material & Thickness ☐ Steel (10 Ga Face Flange / 11 Ga Perf Plate) ☐ 304 Stainless Stl (14 Ga Face Flange & Perf Plate)	☐ 1/4-20 x 2" Pinned Flat Head Torx Machine Screws (STANDARD) ☐ Other Rear Mounting Frame				
☐ Aluminum (1/8" Face Flange & Perf Plate)	16 Ga Galvanized Steel with Threaded Nutserts / Rivnuts (STANDARD)				
Sleeve Thickness ☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16" ☐ Other	OPTIONAL ACCESSORIES				
Finish	Security Bars in Sleeve (see detail sheet)				
 White Powder Coat (STANDARD) Satin Polish Finish (Stn Steel Only) Rust-Inhibiting Primer Other 	 Model OB-1 Opposed Blade Damper - Front Operated (Requires oversized hole in perforated plate for damper access) Model OB-1 Opposed Blade Damper - Rear Operated Other Options (please specify) 				
All dimensions are in inches.					
JOB NAME:	SUBMITTED BY:				