


SUBMITTAL SHEET

www.anemostat-hvac.com

**SECURITY FACE PLATE
w/ SLEEVE**

FACE SCREW HOLES

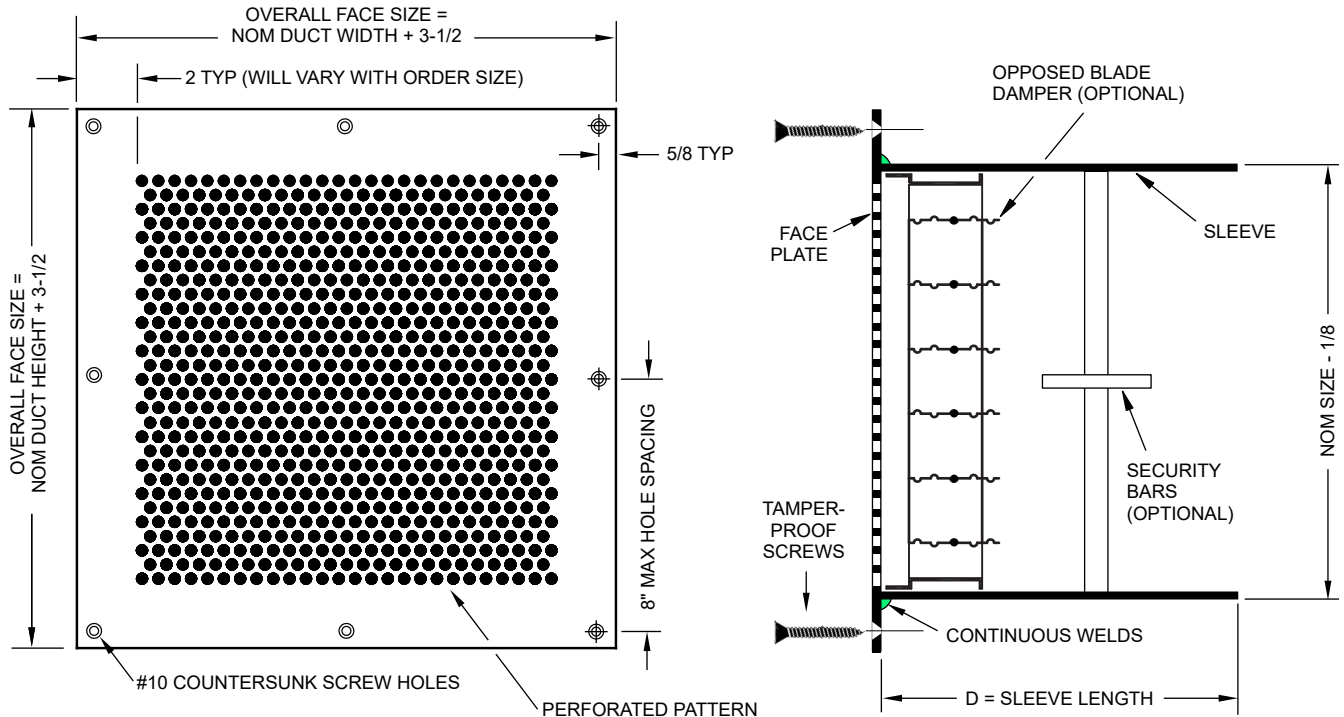

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Perforated Hole Pattern

- ☐ (P5) 5/32" Ø Holes on 7/32" Stg. Centers
- ☐ (P6) 3/16" Ø Holes on 9/32" Stg. Centers

Face Plate Thickness

12 GA. (STANDARD)

Sleeve Thickness

- ☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"
- ☐ Other _____

Material

- ☐ Plain Steel (STANDARD) ☐ Aluminum*
- ☐ 304 Stn Stl* ☐ 316 Stn Stl* ☐ Galvanized*
- ☐ Other _____

*(Consult factory for availability)

Tamper-Proof Screws

- ☐ **#10 x 1-1/2" Pinned Flat Head Torx Sheet Metal Screws (STANDARD)**
- ☐ #10-32 x 1-1/2" Pinned Flat Head Torx Machine Screws
- ☐ Other

Finish

- ☐ **White Powder Coat (STANDARD)**
☐ Rust-Inhibiting Primer
☐ Other

OPTIONAL ACCESSORIES

- ☐ Security Bars in Sleeve (see detail sheet)
- ☐ Anchoring Studs (see detail sheet)
- ☐ Model OB-1 Opposed Blade Damper - Front Operated
- ☐ Model OB-1 Opposed Blade Damper - Rear Operated
- ☐ Model SRA Square to Round Duct (ships loose)
- ☐ Other Options (please specify) _____

All dimensions are in inches.

[illegible]**JOB NAME:**

SUBMITTED BY: