



Anemostat®
SECURITY AIR DISTRIBUTION


Model **RRSG**

SUBMITTAL SHEET

www.anemostat-hvac.com

**SECURITY FACE PLATE w/
SLEEVE**

LOCKING ANGLES / FRAME

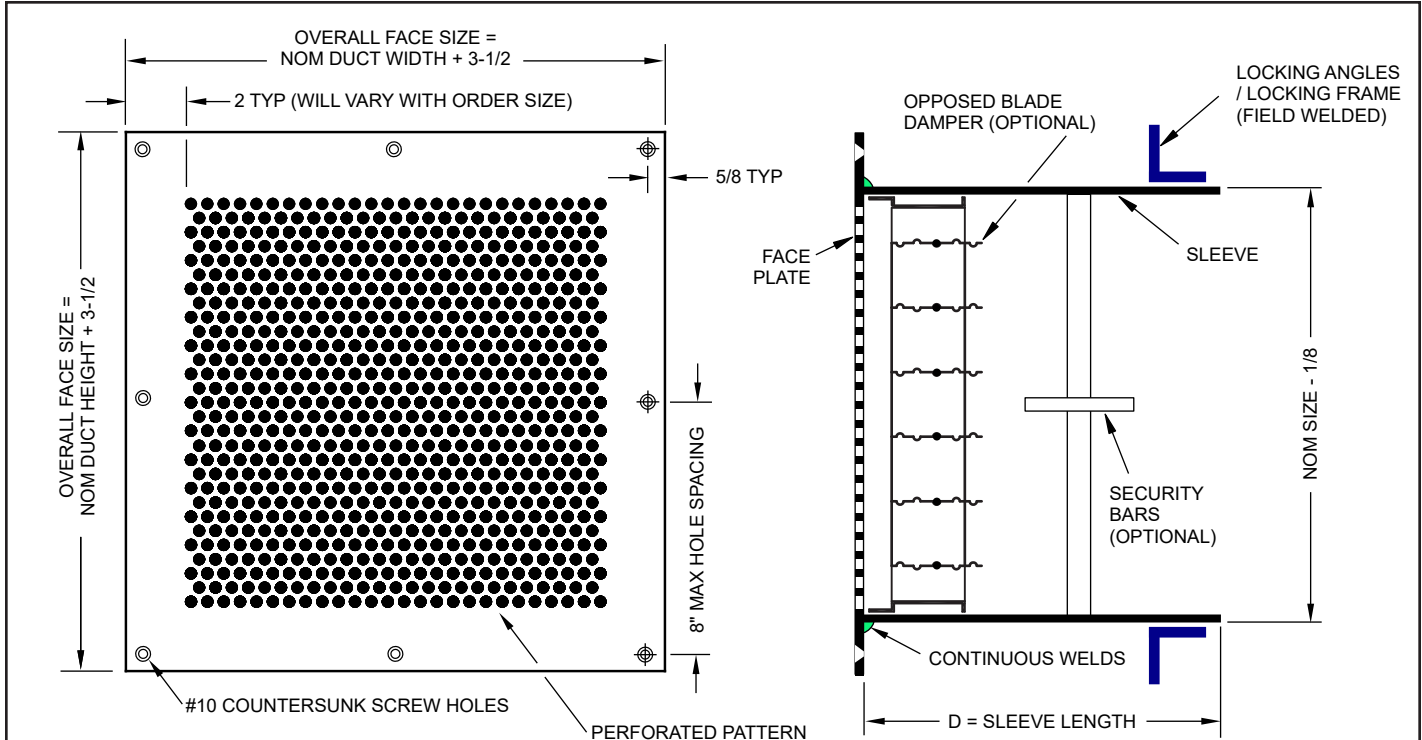

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Perforated Hole Pattern

- ☐ (P5) 5/32" Ø Holes on 7/32" Stg. Centers
☐ (P6) 3/16" Ø Holes on 9/32" Stg. Centers

Face Plate Thickness

12 GA. (STANDARD)

Sleeve Thickness

- ☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"
☐ Other _____

Material

- ☐ Plain Steel (STANDARD) ☐ Aluminum*
☐ 304 Stn Stl* ☐ 316 Stn Stl* ☐ Galvanized*
☐ Other _____

*(Consult factory for availability)

Finish

- ☐ White Powder Coat (STANDARD)
☐ Rust-Inhibiting Primer
☐ Other _____

Locking Angle (2 Pieces)

- ☐ 1" x 1" x 3/16" (STANDARD)
☐ 1-1/2" x 1-1/2" x 3/16"
☐ 2" x 2" x 3/16"
☐ Other _____

Locking Frame

- ☐ 1" x 1" x 3/16" (Optional)
☐ Other _____

OPTIONAL ACCESSORIES

- ☐ Security Bars in Sleeve (see detail sheet)
☐ Anchoring Studs (see detail sheet)
☐ Model OB-1 Opposed Blade Damper - Front Operated
☐ Model OB-1 Opposed Blade Damper - Rear Operated
☐ Model SRA Square to Round Duct (ships loose)
☐ Other Options (please specify) _____

All dimensions are in inches.

Q T Y	Order Size (NOM DUCT SIZE)		
	W	H	D

JOB NAME:

SUBMITTED BY: