



**Anemostat®**  
SECURITY AIR DISTRIBUTION


Model **RRSG**

# SUBMITTAL SHEET

www.anemostat-hvac.com

**SECURITY FACE PLATE w/  
SLEEVE**

**REAR MOUNTING FRAME**

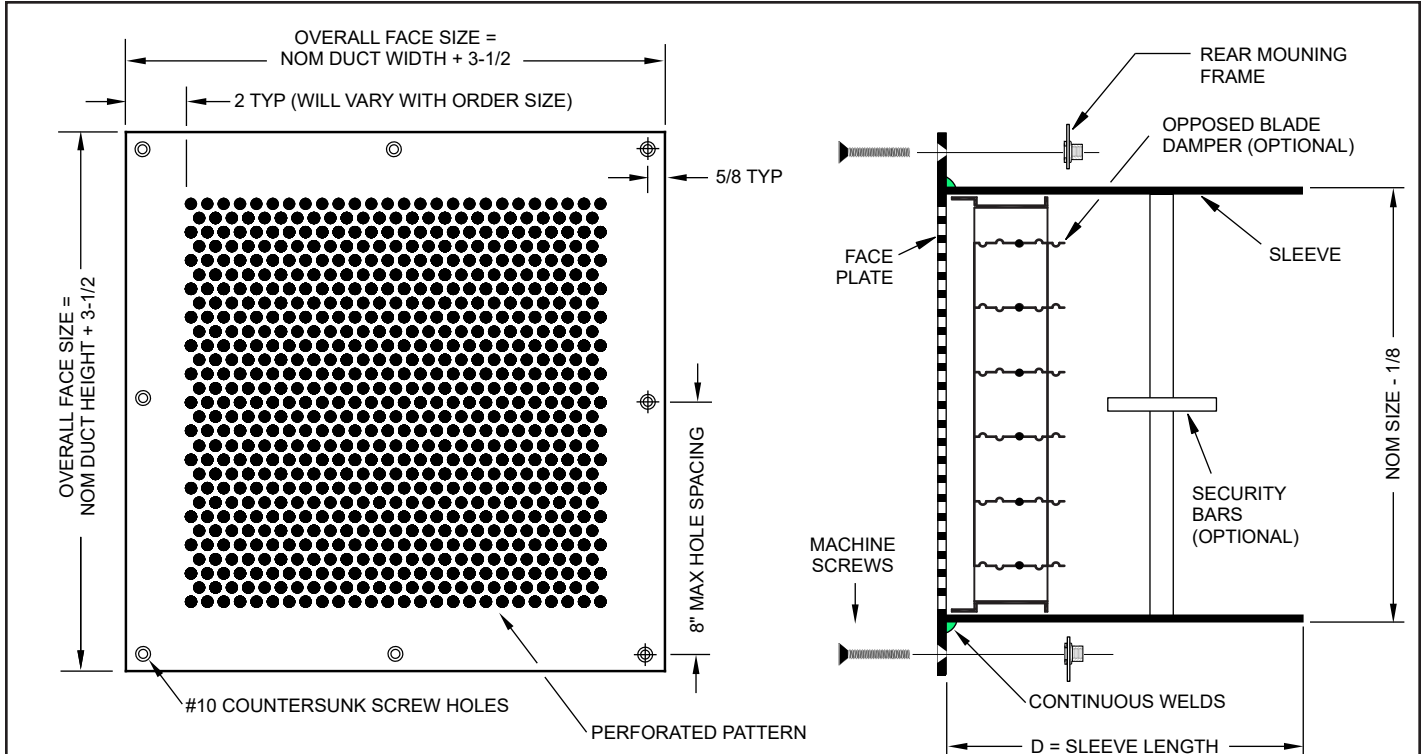

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

## PRODUCT FEATURES

### Perforated Hole Pattern

- ☐ (P5) 5/32" Ø Holes on 7/32" Stg. Centers  
☐ (P6) 3/16" Ø Holes on 9/32" Stg. Centers

### Face Plate Thickness

**12 GA. (STANDARD)**

### Sleeve Thickness

- ☐ **12 GA. (STD)**    ☐ 10 GA.    ☐ 3/16"  
☐ Other \_\_\_\_\_

### Material

- ☐ **Plain Steel (STANDARD)**    ☐ Aluminum\*  
☐ 304 Stn Stl\*    ☐ 316 Stn Stl\*    ☐ Galvanized\*  
☐ Other \_\_\_\_\_

\*(Consult factory for availability)

### Finish

- ☐ **White Powder Coat (STANDARD)**  
☐ Rust-Inhibiting Primer  
☐ Other \_\_\_\_\_

### Tamper-Proof Screws

- ☐ **1/4-20 x 2" Pinned Flat Head Torx Machine Screws (STANDARD)**  
☐ Other \_\_\_\_\_

### Rear Mounting Frame

- ☐ **16 Ga Galvanized Steel with Threaded Nutserts / Rivnuts (STANDARD)**  
☐ Other \_\_\_\_\_

## OPTIONAL ACCESSORIES

- ☐ Security Bars in Sleeve (see detail sheet)  
☐ Anchoring Studs (see detail sheet)  
☐ Model OB-1 Opposed Blade Damper - Front Operated  
☐ Model OB-1 Opposed Blade Damper - Rear Operated  
☐ Model SRA Square to Round Duct (ships loose)  
☐ Other Options (please specify) \_\_\_\_\_

Q T Y	Order Size (NOM DUCT SIZE)		
	W	H	D

All dimensions are in inches.

**JOB NAME:**

**SUBMITTED BY:**