
Model RRSG

SECURITY FACE PLATE w/ **SLEEVE**

LOCKING ANGLES / FRAME

SUBMITTAL SHEET

www.anemostat-hvac.com

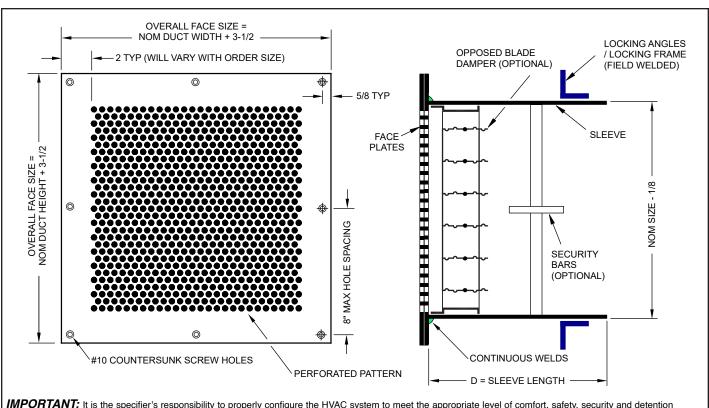

The tile tile specified a responsibility to properly configure tile tile contact the appropriate level of configure tile tile.					
PRODUCT FEATURES Perforated Hole Pattern	Locking Angle (2 Pieces)		Order Size (NOM DUCT SIZE)		
(P5) 5/32" Ø Holes on 7/32" Stg. Ctrs (STD)	☐ 1" x 1" x 3/16" (STANDARD)	Y	w	Н	D
Face Plate Thickness	☐ 1-1/2" x 1-1/2" x 3/16"				
3/16" (12 GA+14 GA Welded Composite)(STD)	2" x 2" x 3/16"				
Sleeve Thickness	U Other				
☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"	Locking Frame				
Other	1" x 1" x 3/16" (Optional)				
Material	Other				
☐ Plain Steel (STANDARD) ☐ Aluminum*					
☐ 304 Stn Stl* ☐ 316 Stn Stl* ☐ Galvanized*	OPTIONAL ACCESSORIES				
Other	☐ Security Bars in Sleeve (see detail sheet)				
*(Consult factory for availability)	☐ Anchoring Studs (see detail sheet)				
<u>Finish</u>	☐ Model OB-1 Opposed Blade Damper - Front				
	Operated				
Rust-Inhibiting Primer	 Model OB-1 Opposed Blade Damper - Rear Operated 				
Other	☐ Model SRA Square to Round Duct (ships loose)				
	Other Options (please specify)				
All dimensions are in inches.					
JOB NAME:	SUBMITTED BY:				

DWG #: RRSG-S-1007