


SUBMITTAL SHEET

www.anemostat-hvac.com

**SECURITY FACE PLATE w/
SLEEVE**

REAR MOUNTING FRAME

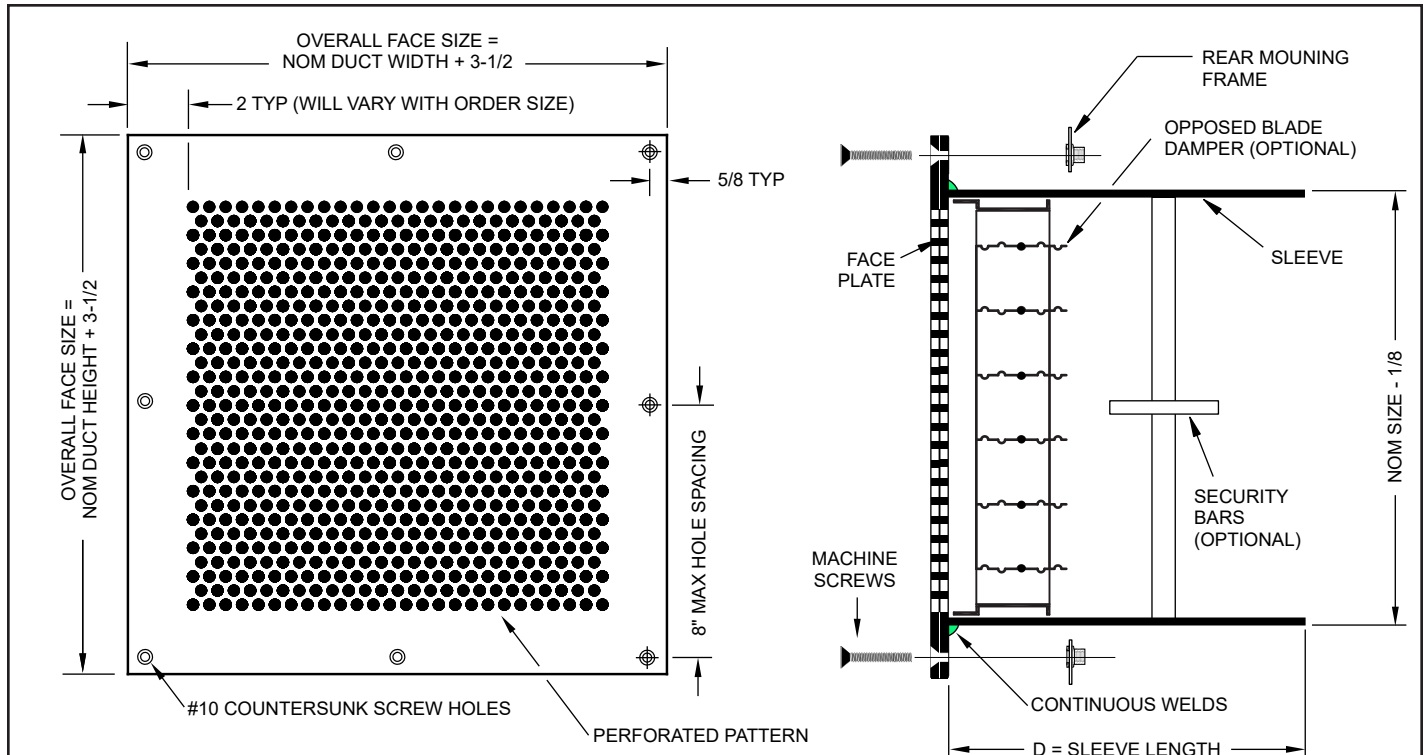

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Perforated Hole Pattern

(P5) 5/32" Ø Holes on 7/32" Stg. Ctrs (STD)

Face Plate Thickness

3/16" (12 GA+14 GA Welded Composite)(STD)

Sleeve Thickness

☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"

☐ Other _____

Material

☐ Plain Steel (STANDARD) ☐ Aluminum*

☐ 304 Stn Stl* ☐ 316 Stn Stl* ☐ Galvanized*

☐ Other _____

*(Consult factory for availability)

Finish

☐ **White Powder Coat (STANDARD)**☐ Rust-Inhibiting Primer☐ Other _____

Tamper-Proof Screws

☐ 1/4-20 x 2" Pinned Flat Head Torx Machine Screws (STANDARD)

☐ Other _____

Rear Mounting Frame

☐ 16 Ga Galvanized Steel with Threaded Nutserts / Rivnuts (STANDARD)

☐ Other _____

OPTIONAL ACCESSORIES

☐ Security Bars in Sleeve (see detail sheet)

☐ Anchoring Studs (see detail sheet)

☐ Model OB-1 Opposed Blade Damper - Front Operated

☐ Model OB-1 Opposed Blade Damper - Rear Operated

☐ Model SRA Square to Round Duct
(ships loose)

☐ Other Options (please specify) _____

[illegible]

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: