


# SUBMITTAL SHEET

**www.anemostat-hvac.com**

## SECURITY ADJUSTABLE SUPPLY GRILLE

## SINGLE DEFLECTION

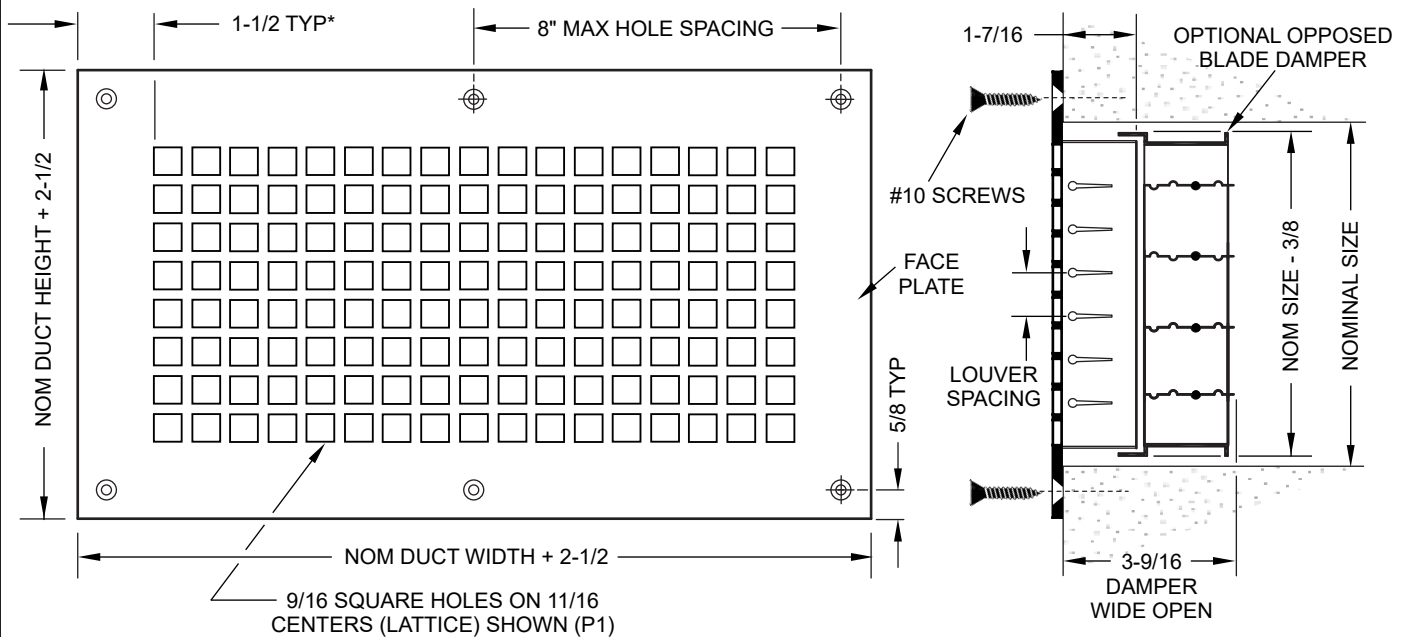

\* BORDER DIMENSION WILL VARY WITH PATTERN AND ORDER SIZE

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

## PRODUCT FEATURES

## Model

- ☐ 10-MS (Adjustable Louver 3/4" Spacing)  
☐ 15-MS (Adjustable Louver 1/2" Spacing)

### Louver Direction

- ☐ L (Parallel to **L**ong Dimension)
- ☐ S (Parallel to **S**hort Dimension)

### Face Plate Thickness

- ☐ 12 GA. (STANDARD)  
☐ 10 GA. ☐ 14 GA.  
☐ Other

### Perforated Hole Pattern

- ☐ (P1) 9/16" Sq. Holes on 11/16" Ctrs (STD)
- ☐ (P2) 13/16" Sq. Holes on 1" Centers
- ☐ (P8) 1/4" Dia. Holes on 3/8" Staggered Ctrs
- ☐ (P9) 5/16" Dia. Holes on 7/16" Staggered Ctrs
- ☐ Other

## Finish

- ☐ **White Powder Coat (STANDARD)**  
☐ Rust-Inhibiting Primer  
☐ Other

### Face Material

- ☐ **Plain Steel (STANDARD)**  
☐ 304 Stainless Steel\*    ☐ 316 Stainless Steel\*  
☐ Aluminum\*                      ☐ Galvanized\*  
☐ Other

\*(Consult factory for availability)

## Tamper-Proof Screws

- ☐ **#10 x 1-1/2" Pinned Flat Head Torx Sheet Metal Screws (STANDARD)**
- ☐ No Screw Holes or Screws / No Rear Frame
- ☐ Other

## OPTIONAL ACCESSORIES

- Model OB-1 Opposed Blade Damper  
☐ Front Operated ☐ Rear Operated  
☐ Model SRA Square to Round Duct  
 (ships loose)  
☐ Other Options (please specify) \_\_\_\_\_

All dimensions are in inches.

[illegible]**JOB NAME:**

SUBMITTED BY: