


# SUBMITTAL SHEET

**www.anemostat-hvac.com**

## SECURITY ADJUSTABLE SUPPLY GRILLE

### ***SINGLE DEFLECTION***

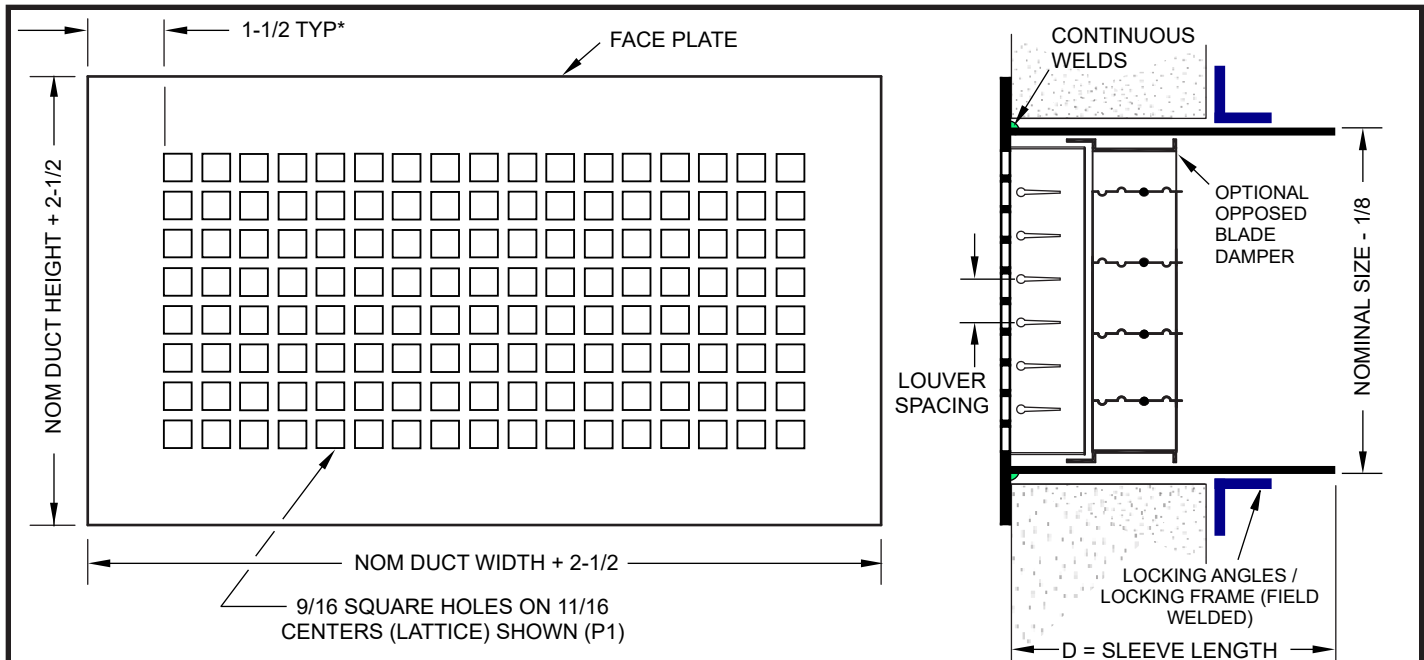

\* BORDER DIMENSION WILL VARY WITH PATTERN AND ORDER SIZE

All dimensions are in inches.

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

## PRODUCT FEATURES

## Model

- ☐ 10-MS (Adjustable Louver 3/4" Spacing)
- ☐ 15-MS (Adjustable Louver 1/2" Spacing)

### Louver Direction

- ☐ L (Parallel to **L**ong Dimension)
- ☐ S (Parallel to **S**hort Dimension)

### Face Plate Thickness

- ☐ 12 GA. (STANDARD)
- ☐ 10 GA.                      ☐ 14 GA.
- ☐ Other

### Perforated Hole Pattern

- ☐ (P1) 9/16" Sq. Holes on 11/16" Ctrs (STD)  
☐ (P2) 13/16" Sq. Holes on 1" Centers  
☐ (P8) 1/4" Dia. Holes on 3/8" Staggered Ctrs  
☐ (P9) 5/16" Dia. Holes on 7/16" Staggered Ctrs  
☐ Other

## Finish

- ☐ **White Powder Coat (STANDARD)**  
☐ Rust-Inhibiting Primer  
☐ Other

### Sleeve Thickness

- ☐ 12 GA. (STD)      ☐ 10 GA.      ☐ 3/16"
- ☐ Other \_\_\_\_\_

### Face Material

- ☐ Plain Steel (STANDARD)
- ☐ 304 Stainless Steel\*    ☐ 316 Stn Steel\*
- ☐ Aluminum\*                      ☐ Galvanized\*
- ☐ Other

\*(Consult factory for availability)

### Locking Angle (2 Pieces)

- ☐ 1" x 1" x 3/16" (STANDARD)
- ☐ 1-1/2" x 1-1/2" x 3/16"      ☐ 2" x 2" x 3/16"
- ☐ Other

## Locking Frame

- ☐ 1" x 1" x 3/16" (Optional)  
☐ Other \_\_\_\_\_

## OPTIONAL ACCESSORIES

- Model OB-1 Opposed Blade Damper  
☐ Front Operated                      ☐ Rear Operated  
☐ Model SRA Square to Round  
 Duct Adapter (ships loose)  
☐ Other Options

[illegible]**JOB NAME:**

SUBMITTED BY: