


SUBMITTAL SHEET

www.anemostat-hvac.com

SECURITY ADJUSTABLE SUPPLY GRILLE

DOUBLE DEFLECTION

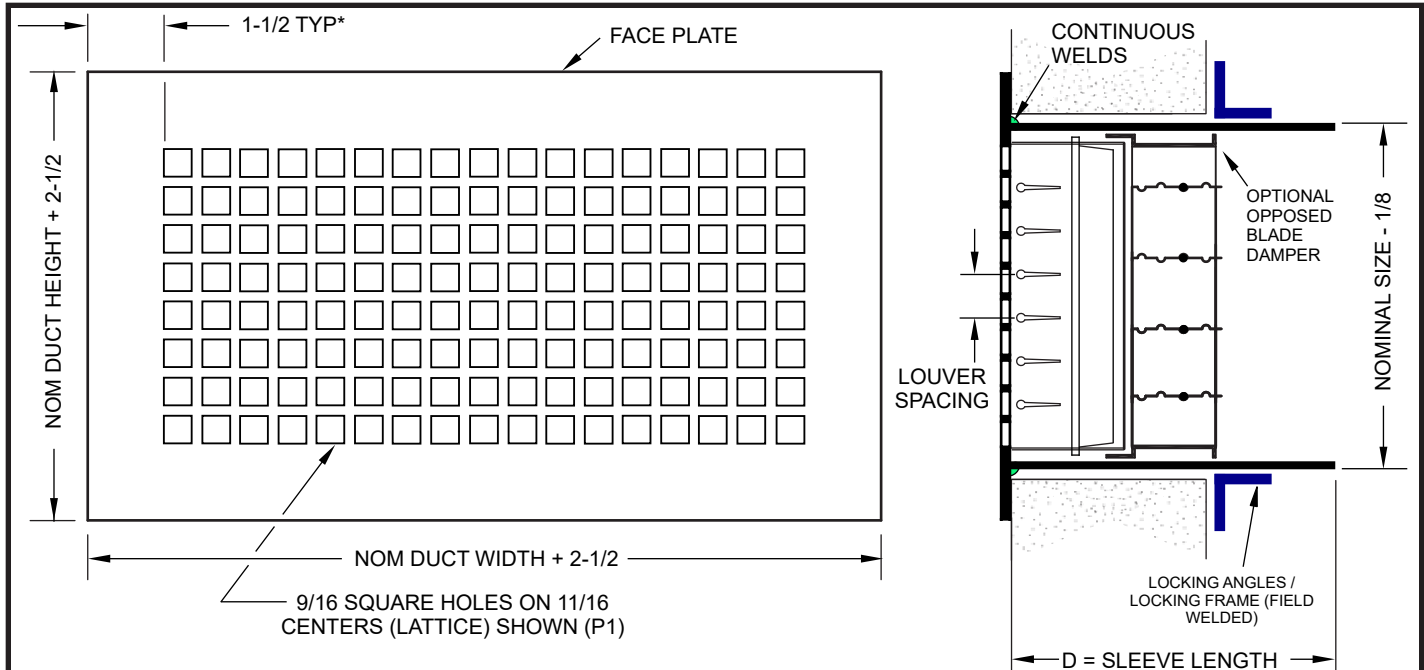

* BORDER DIMENSION WILL VARY WITH PATTERN AND ORDER SIZE

All dimensions are in inches.

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Model

- ☐ 20-MS (Adjustable Louver 3/4" Spacing)
- ☐ 25-MS (Adjustable Louver 1/2" Spacing)

Louver Direction

- ☐ L (Parallel to **L**ong Dimension)
- ☐ S (Parallel to **S**hort Dimension)

Face Plate Thickness

- ☐ 12 GA. (STANDARD)
- ☐ 10 GA. ☐ 14 GA.
- ☐ Other _____

Perforated Hole Pattern

- ☐ (P1) 9/16" Sq. Holes on 11/16" Ctrs (STD)
- ☐ (P2) 13/16" Sq. Holes on 1" Centers
- ☐ (P8) 1/4" Dia. Holes on 3/8" Staggered Ctrs
- ☐ (P9) 5/16" Dia. Holes on 7/16" Staggered Ctrs
- ☐ Other

Finish

- ☐ **White Powder Coat (STANDARD)**
☐ Rust-Inhibiting Primer
☐ Other _____

Sleeve Thickness

- ☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"
- ☐ Other _____

Face Material

- ☐ Plain Steel (STANDARD)
- ☐ 304 Stainless Steel* ☐ 316 Stn Steel*
- ☐ Aluminum* ☐ Galvanized*
- ☐ Other

*(Consult factory for availability)

Locking Angle (2 Pieces)

- ☐ 1" x 1" x 3/16" (STANDARD)
- ☐ 1-1/2" x 1-1/2" x 3/16" ☐ 2" x 2" x 3/16"
- ☐ Other

Locking Frame

- ☐ 1" x 1" x 3/16" (Optional)
☐ Other

OPTIONAL ACCESSORIES

- Model OB-1 Opposed Blade Damper
☐ Front Operated ☐ Rear Operated
☐ Model SRA Square to Round
 Duct Adapter (ships loose)
☐ Other Options

[illegible]**JOB NAME:**

SUBMITTED BY: