

PRODUCT FEATURES

- 1/2" (13) or 3/4" (19) Louver spacing
- Registers include a factory attached steel opposed blade volume control damper (aluminum damper available)
- Surface mounted holes in frame neatly countersunk for supplied #8 x 1-1/2" oval head screws

CONSTRUCTION DETAILS



- Material:**
Aluminum Construction
- Finish:**
- Arctic White (std)
 - Custom Color (opt)

Models

- 30-0** 3/4" (19) Blade Spacing, 0° Deflection
- 30-45** 3/4" (19) Blade Spacing, 45° Deflection
- 35-0** 1/2" (13) Blade Spacing, 0° Deflection
- 35-45** 1/2" (13) Blade Spacing, 45° Deflection


Accessories

- OB** Opposed Blade Damper
- RC** Removable Core Frame

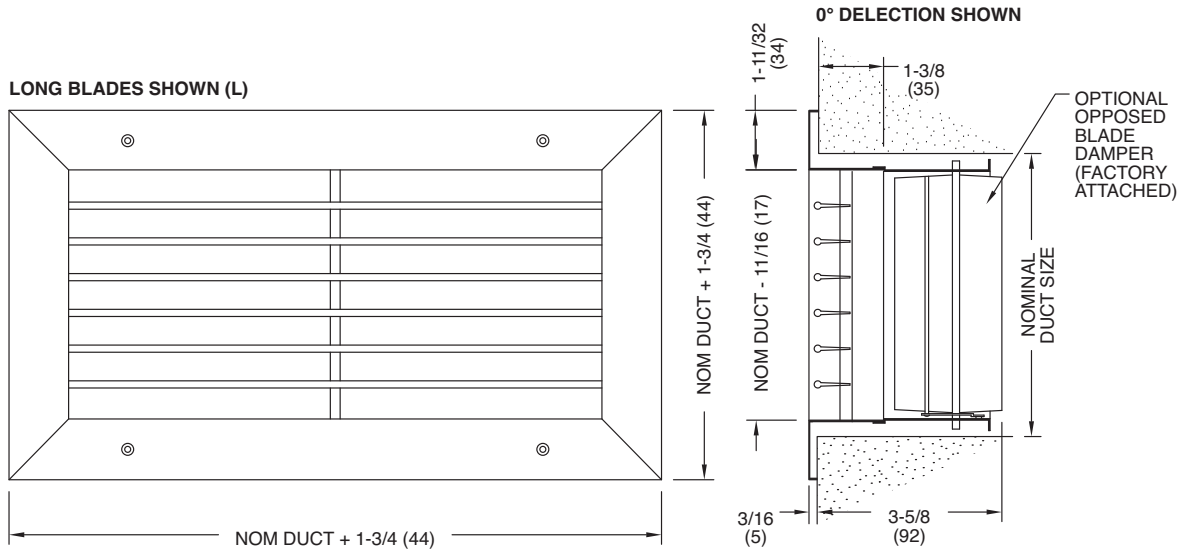


SHORT BLADES (S)

45° DEFECTION, 3/4" (19) SPACING



45° DEFECTION, 1/2" (13) SPACING

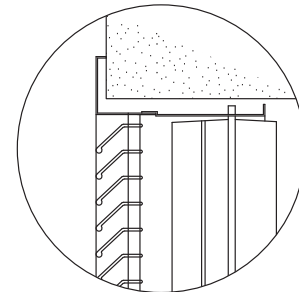

Dimensions in () are millimeters

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: