

SUBMITTAL SHEET

www.anemostat-hvac.com

 3/4" Blade Spacing - 40° Deflection
 9/16" Narrow Slot Grid System

PRODUCT FEATURES

- High airflow capacity with low NC and pressure drop ratings
- 23/32" Narrow border maximizes free area and appearance
- 40° fixed louver deflection, 3/4" spacing
- Optional Model OB-1 opposed blade volume control damper

CONSTRUCTION DETAILS

Blade Direction:

- L Blades LONG Dimension
- S Blades SHORT Dimension

Materials:

- ST Steel
- AL Aluminum
- 04 Stainless Steel

Finish:



- WH Arctic White Powder Coat
- 4P Polished Frame / Mill Blades (Stn Stl)
- C1 Custom Color _____

MODELS

- ACE30 - D 40° deflection

Accessories:

- OB-1-ST Opposed Blade Damper (Steel)
- OB-1-AL Opposed Blade Damper (Alum)
- OB-1-04 Opposed Blade Damper (Stn Steel)

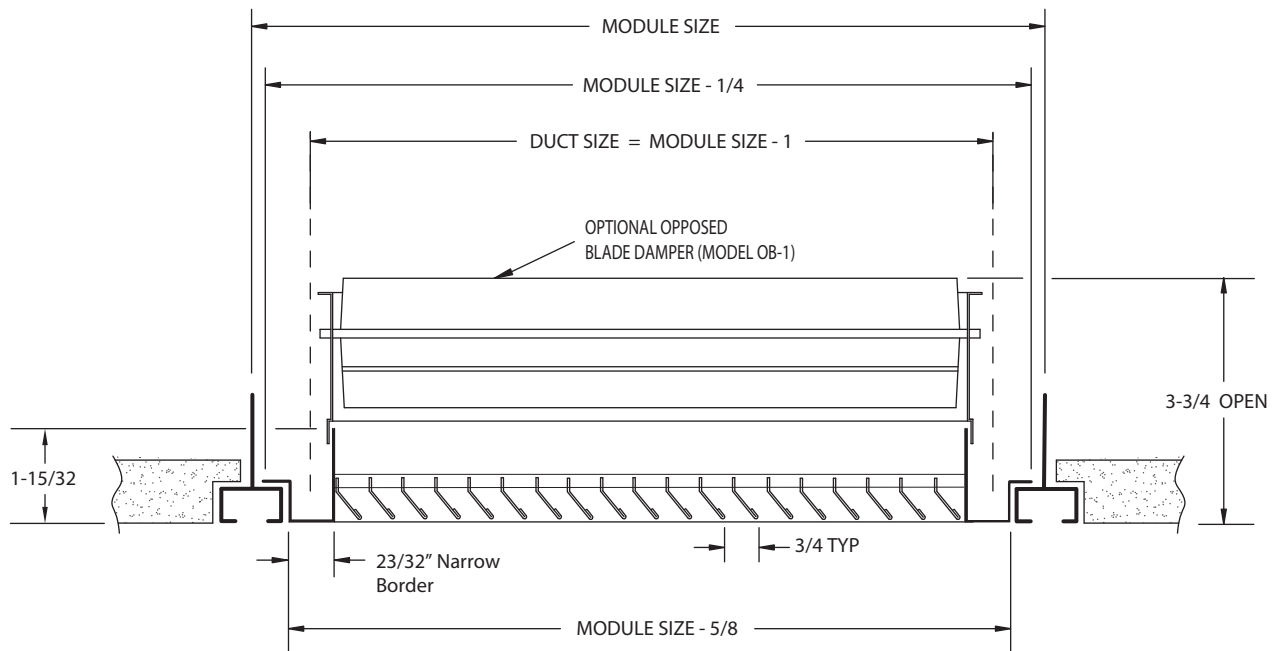

STANDARD MODULE SIZES	DUCT SIZE
12 X 12	11 X 11
12 X 24	11 X 23
24 X 24	23 X 23
24 X 48	23 X 47
30 X 30	29 X 29

NOTES:

1. STANDARD BLADE DIRECTION PARALLEL TO LONGER DIMENSION.
2. UNIT AVAILABLE WITH SHORT BLADES.
3. THIS MODEL CAN BE MANUFACTURED TO ANY MODULE SIZE.

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: