

**PRODUCT FEATURES**

- Blades fixed at 0°
- Optional stainless steel opposed blade volume control damper, face operated (OBD)
- Countersunk screw holes and stainless steel screws
- Single piece construction up to 48" x 48"

**CONSTRUCTION DETAILS**

**Material:** 20 GA 304 stainless steel (std)  
 20 GA 316 stainless steel (opt)  
**Finish:** Satin polish (std)


**Models**

- 30-0-S** 3/4" (19) Blade Spacing, 0° Deflection, Short Blades
- 35-0-S** 1/2" (13) Blade Spacing, 0° Deflection, Short Blades
- 30-0-L** 3/4" (19) Blade Spacing, 0° Deflection, Long Blades
- 35-0-L** 1/2" (13) Blade Spacing, 0° Deflection, Long Blades



**Accessories**

- OB** Opposed Blade Damper

**LONG BLADES SHOWN (L)**

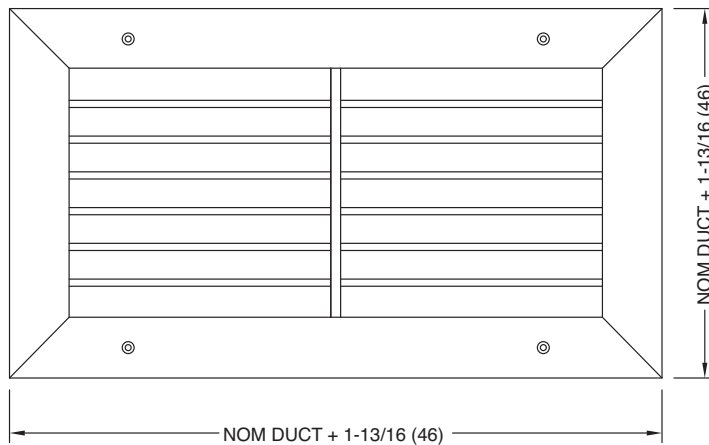

**SHORT BLADES (S)**

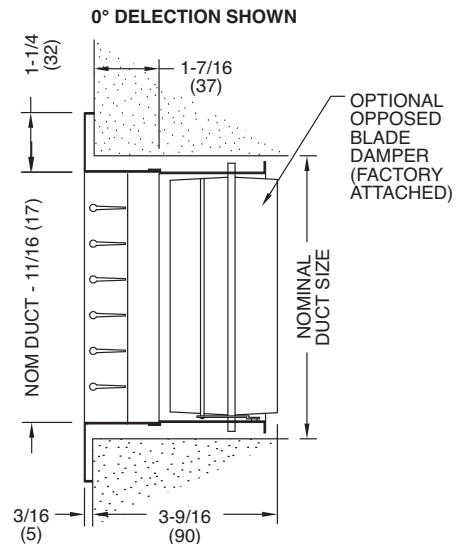

All dimensions are in inches.

**JOB NAME:**

**SUBMITTED BY:**