

# S-VENT<sup>®</sup>

## SUBMITTAL SHEET





1220 WATSONCENTER ROAD • CARSON, CA 90745-4206  
 (310) 835-7500 • FAX (310) 835-0448  
 e-mail: airsec@anemostat.com • website: www.anemostat-hvac.com

# SSV432-DM

MAXIMUM SECURITY  
 DIFFUSER  
 without  
 FACEPLATE DEFLECTION  
 DUCT MOUNTED

### TOP SECTION

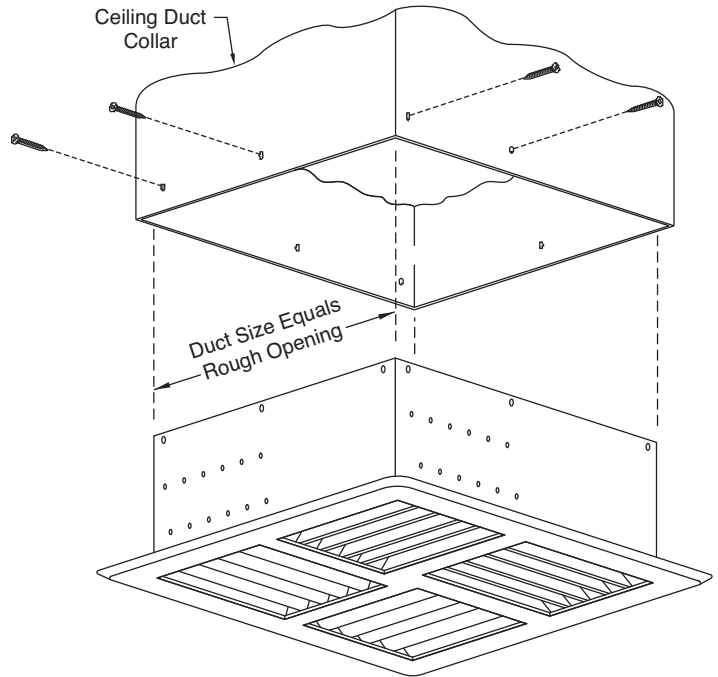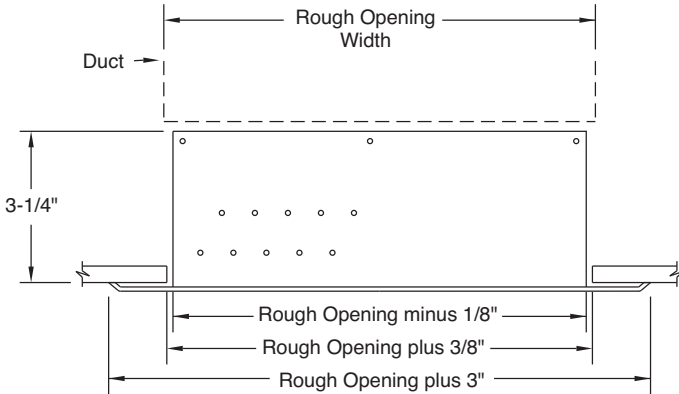


Grille Designation & Type	Rough Opening (inches)
SV432 - 8/8	08 x 08
SV432 - 12/12	12 x 12
SV432 - 16/16	16 x 16
SV432 - 20/20	20 x 20
SV432 - 24/24	24 x 24

Special Sizes available upon request.

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

### THROW PATTERNS

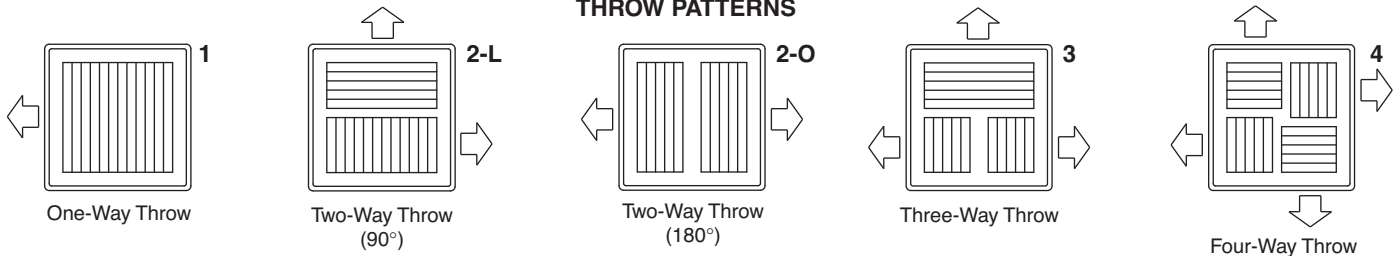

### PRODUCT FEATURES

#### Face Flange

16 GA (standard)

#### Material Type

Stainless Steel (standard)

#### Horizontal Louvers

16 GA with 3-1/4" Neck Depth (std)

#### Finish

Satin Polish (std)

White Powder Coat (opt)

Other Powder Coat Colors \_\_\_\_\_

#### Sleeve (optional)

16 GA Galvanized - specify length \_\_\_\_\_

#### Locking Frame

1" x 1" x 3/16" (optional)

#### Opposed Blade Damper (optional) (galvanized, shipped loose)

Rear Operated

#### Anchoring Studs -(optional)

Nelson Type - specify stud size \_\_\_\_\_

QTY	ROUGH OPENING		THROW PATTERN
	W"	X H"	
27	9	9	2-L

### SUBMITTAL APPROVAL

<b>Job Name and Location</b>			
<b>Engineer</b>	Date	<b>Factory</b>	Date
<b>Mfr. Rep.</b>	Date	<b>Submitted By</b>	Date

OCTOBER 2016  
 NEW CONSTRUCTION  
 STAINLESS STEEL