



Anemostat®

SECURITY AIR DISTRIBUTION


Model **SV2-SL**

SUBMITTAL SHEET

www.anemostat-hvac.com

LIGATURE RESISTANT GRILLE
3/16" X 3/16" APERTURES

MAXIMUM SECURITY • SLEEVE

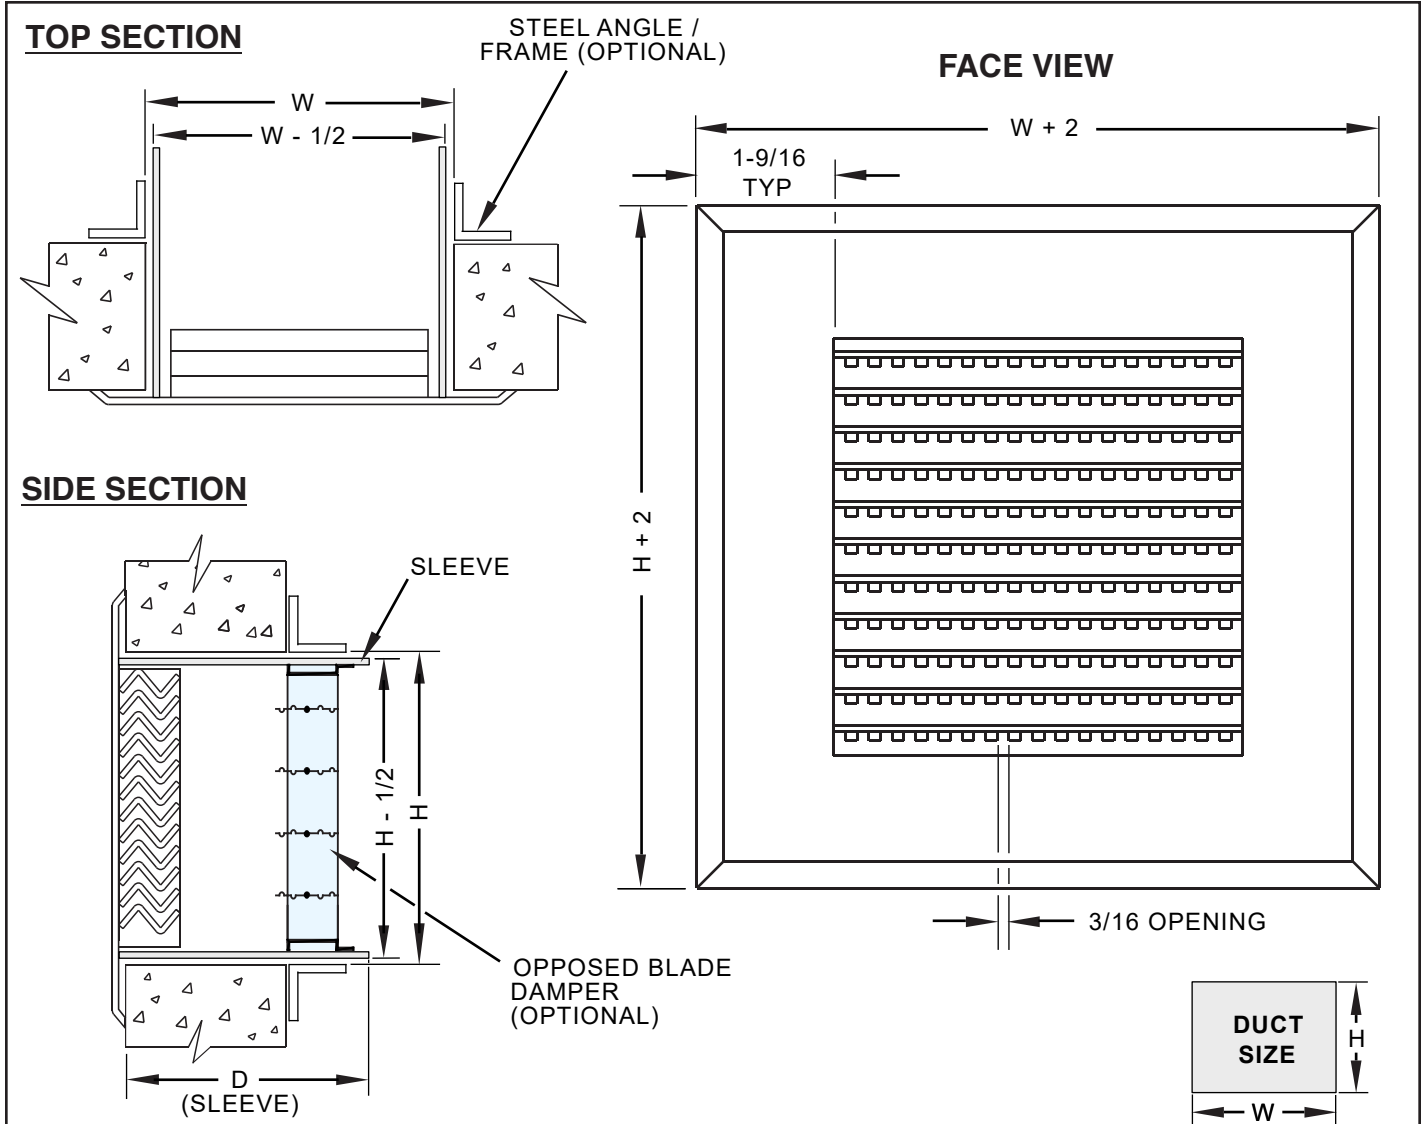

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Grille Construction

- Cold Rolled Steel (CRS)
- 14 Gauge Face and Core

Sleeve - Steel

14 Gauge (STANDARD) 12 Gauge

Other _____

Finish

White Powder Coat (STANDARD)

Other _____

Options

Model OB-1 Opposed Blade Damper
(*Rear Operated*, Galvzd Steel, Field Installed)

Model LA Locking Angle / Frame

(2) Loose Pieces Frame

1 x 1 x 1/8 1 x 1 x 3/16

Other _____

All dimensions are in inches.

QTY	Order Size	D Sleeve

JOB NAME:

SUBMITTED BY:



Anemostat®

SECURITY AIR DISTRIBUTION

Model **SV2/3/6-SL**

SUBMITTAL SHEET

www.anemostat-hvac.com

LIGATURE RESISTANT GRILLE
3/16" X 3/16" APERTURES


MAXIMUM SECURITY • SLEEVE

ORDER SIZE

Order size is based on the table below for a given Duct Width x Duct Height. For example, an S-Vent SV2 grille for a duct size of 10" x 10" is Model SV2-SL-C3.

		DUCT WIDTH								
		6	8	10	12	14	16	18	20	22
DUCT HEIGHT	6	A1	B1	C1	D1	E1	F1	G1	H1	J1
	8	A2	B2	C2	D2	E2	F2	G2	H2	J2
	10	A3	B3	C3	D3	E3	F3	G3	H3	J3
	12	A4	B4	C4	D4	E4	F4	G4	H4	J4
	14	A5	B5	C5	D5	E5	F5	G5	H5	J5
	16	A6	B6	C6	D6	E6	F6	G6	H6	J6
	18	A7	B7	C7	D7	E7	F7	G7	H7	J7
	20	A8	B8	C8	D8	E8	F8	G8	H8	J8
	22	A9	B9	C9	D9	E9	F9	G9	H9	J9

INSTALLATION (EXPLODED VIEW)

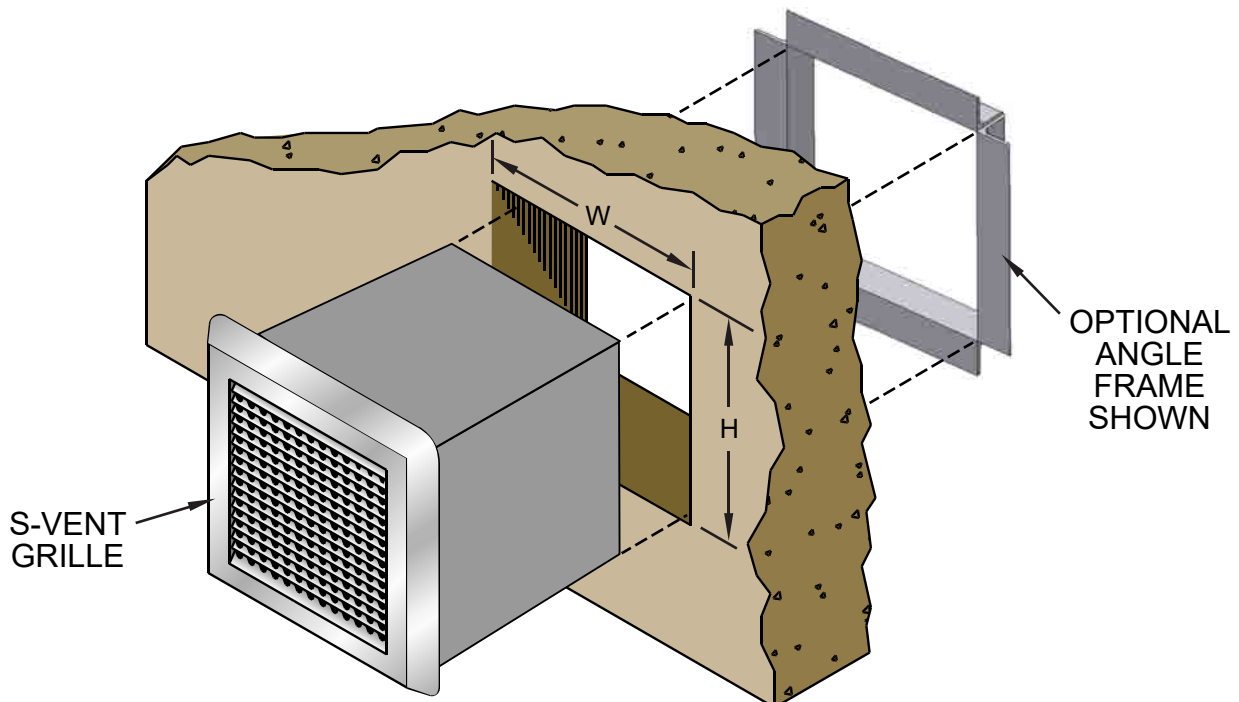

JOB NAME:

SUBMITTED BY: