

SUBMITTAL SHEET

www.anemostat-hvac.com

CABLE DRIVEN BUTTERFLY DAMPER

PLENUM APPLICATIONS • OVAL INLETS


PRODUCT FEATURES

- Volume control balancing damper (not full shut-off) with remote cable adjustment
- Install in Flat Oval inlet collar of supply or return air plenums
- Cable accessible from the room thru the diffuser slot opening (pushed up into the slot after balancing)

MODELS


- VDO-C-xx Oval Damper with Cable
 12" Cable 18" Cable 24" Cable
 Example: VDO-C-08-24 (8" Oval, 24" Cable)

Damper shown installed in plenum collar

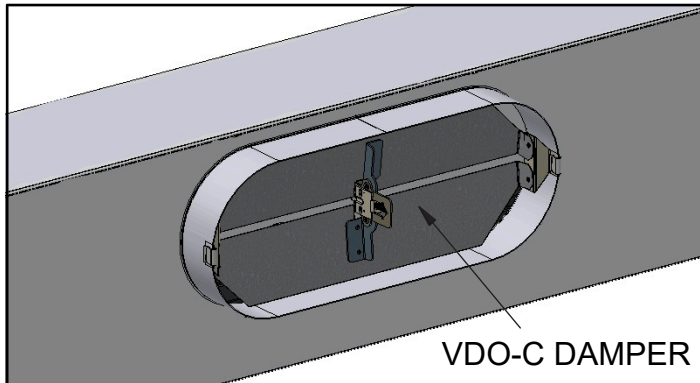


OVAL DUCT SIZE	C	AREA, FT ²	% ROUND
07	7-3/8	.25	98
08	8-15/16	.32	94
09	10-1/2	.38	89
10	12-3/32	.45	85
12	15-7/32	.58	75
14	18-3/8	.71	68

% Round is ratio of Oval Area to Round Area

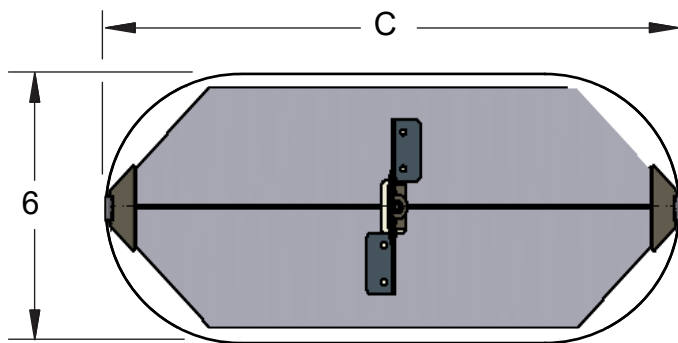

INLET VIEW

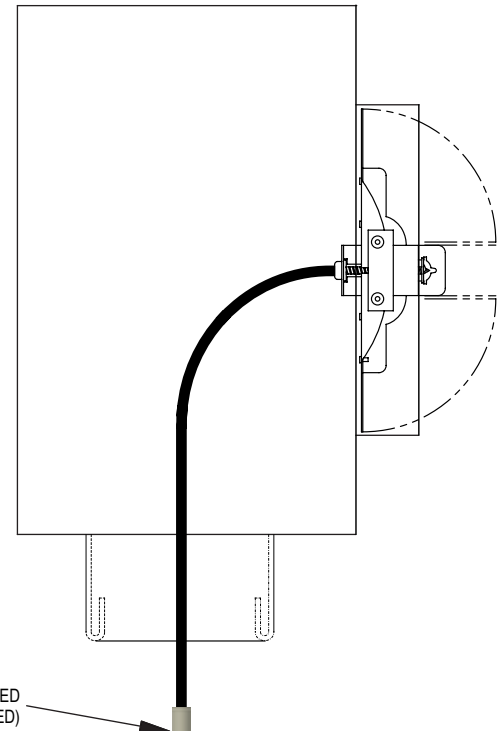

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: