


SUBMITTAL SHEET



Anemostat[®]
A MESTEK COMPANY

P.O. BOX 4938 • 1220 WATSONCENTER ROAD • CARSON, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448
e-mail: airsec@anemostat.com • website: www.anemostat.com

ASFP
MINIMUM SECURITY
HEAVY DUTY STEEL
FACE PLATE

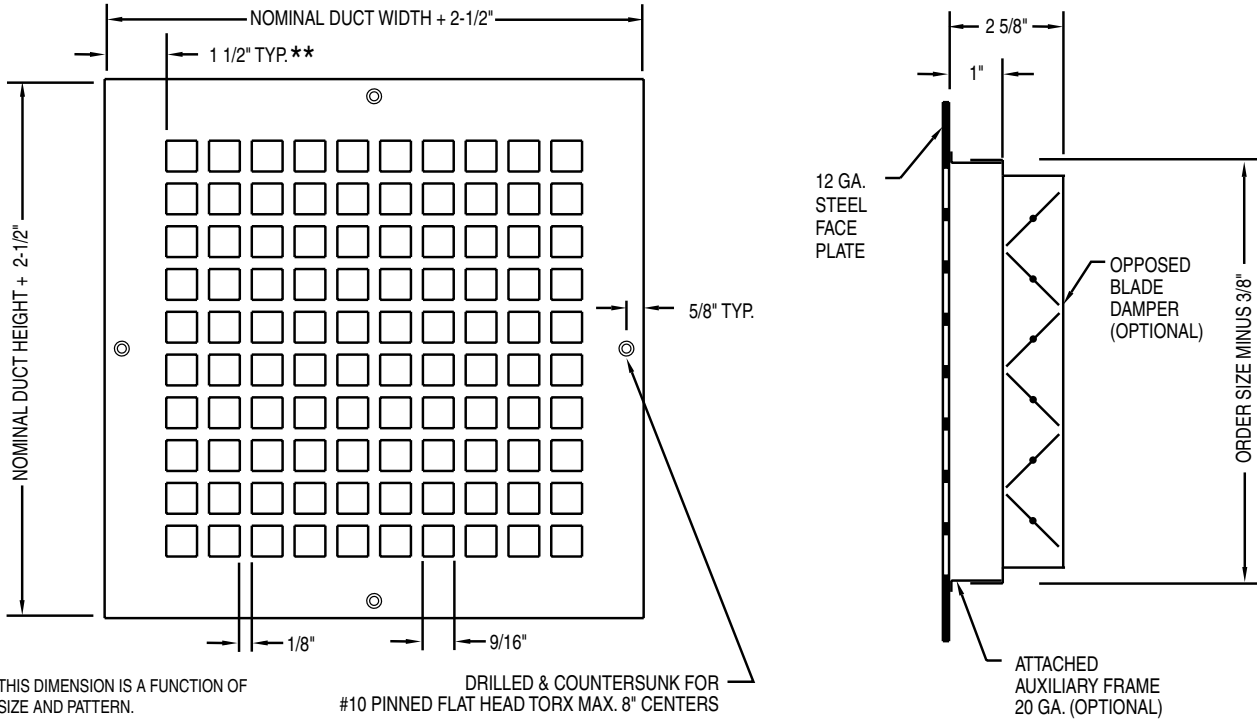

** THIS DIMENSION IS A FUNCTION OF SIZE AND PATTERN.

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Face Plate

- 12 GA. (standard)
- 3/16" GA. (optional)
- 10 GA. (optional)
- 14 GA. (optional)
- Other _____

ASFP Face Plate Patterns

- 9/16" sq. holes on 11/16" ctrs. (standard)
- 13/16" sq. holes on 1" ctrs. (optional)
- 1/4" dia. holes on 3/8" stag. ctrs. (optional)
- 5/16" dia. holes on 7/16" stag. ctrs. (optional)

Material

- Cold Rolled Steel (standard)
 - *Stainless Steel (optional)
 - *Aluminum (optional)
 - *Galvanized (optional)
 - Other _____
- *consult factory for availability

Tamperproof Screws

- #10 x 1-1/2" pinned flat head torx sheet metal screws (standard)
- #10-32 x 1-1/2" pinned flat head torx machine screws (optional)
- Other _____

Opposed Blade Damper -(optional)

- Front Operated
- Rear Operated
- Other _____

Auxiliary Frame -(optional)

- Attached - 20 GA. (standard when OB Damper is required)

Adapter -(optional)

- Square to round (shipped loose)

Finish

- White Powder Coat (standard)
- Rust Inhibiting Prime Coat (optional)
- Other _____

Other Options (please specify)

Qty.	Order Size (Nominal Duct)	
	W"	H"

SUBMITTAL APPROVAL

Job Name and Location			
Engineer	Date	Factory	Date
Mfr. Rep.	Date	Submitted By	Date