

APPLICATION

- Recommended for heating, cooling, ventilating, and projection heating
- Manually adjustable air pattern for a “draftless” horizontal pattern or vertically projected pattern
- Efficient air distribution in cooling applications at temperature differentials as high as 30° F.
- Up to 20 air changes per hour (ACH)
- 360° horizontal air delivery pattern
- Surface mounted or exposed duct

PRODUCT FEATURES


- Steel, adjustable diffuser
- Turning small inner cone raises or lowers inner cone assembly effecting a pattern change
- Deep cone design minimizes smudging and cleaning / repainting expense
- Deep outer cone provides unobstructed air flow patterns near ceiling or structural projections
- Ceiling opening is only 1” larger than neck diameter
- Minimal vertical space required between duct and ceiling
- Arctic White baked-on finish



DIFFUSER OPTIONS

- Aluminum construction
- Custom or optional paint colors
- Accessories – see page G-2

4 - Cone Diffuser

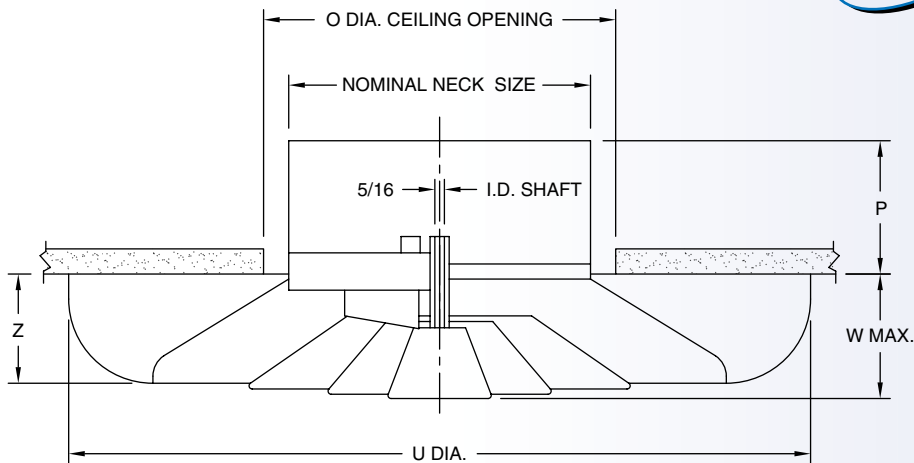

NOMINAL NECK SIZE	O	P	U	W	Z
6	7	2-7/8	14-3/4	2-1/4	1-13/16
8	9	3	20	2-13/16	2-1/16
10	11	3	26-1/2	4-7/16	3-1/8
12	13	2-5/8	26-1/2	4-1/2	3-1/8
15	16	3	37-3/4	5-1/8	4
18	19	2-1/2	37-3/4	4-7/8	4