


APPLICATION

- Recommended for heating, cooling, ventilating, and projection heating
- Manually adjustable air pattern for a “draftless” horizontal pattern or vertically projected pattern – high or low ceilings!
- Horizontal pattern is maintained with or without ceiling effect.
- Efficient air distribution in cooling applications at temperature differentials as high as 30° F.
- Up to 20 air changes per hour (ACH)
- 360° horizontal air delivery pattern
- Surface mounted or exposed duct



PRODUCT FEATURES


- Steel, adjustable diffuser similar to our C-24, but with a shallow outer cone.
- Turning small inner cone raises or lowers inner cone assembly effecting a pattern change
- Quick, removable inner assembly for easy, fast installation
- Arctic White baked-on finish

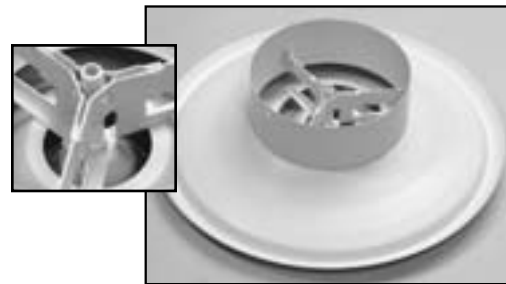

DIFFUSER OPTIONS

- Aluminum construction
- Custom or optional paint colors
- Accessories – see page G-2

4 - Cone Diffuser

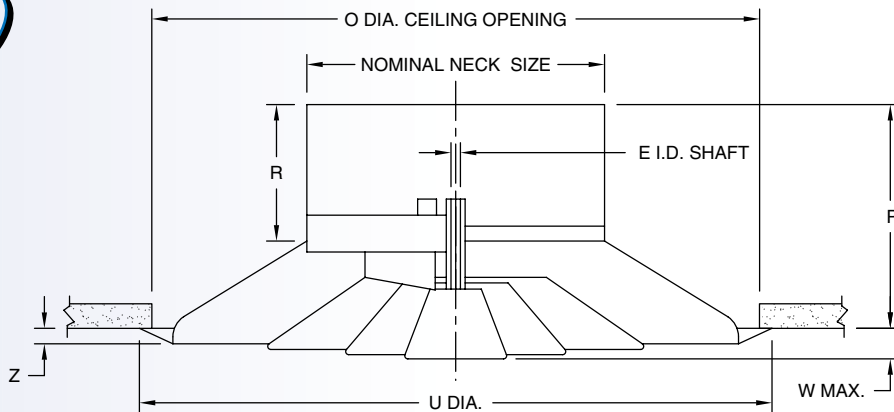

NOMINAL NECK SIZE	O	P	U	W	Z	R	E
6	12	4-1/2	12-3/4	3/4	5/16	3	5/16
8	17	4-1/2	18-1/2	1-3/8	5/8	3	5/16
10	21-3/4	5-1/4	24-1/4	2-5/16	1	3	5/16
12	21-3/4	4-7/8	24-1/4	2-3/8	1	3	5/16
15	31-3/4	5-5/8	35-1/2	2-1/2	1-3/8	3	5/16
18	31-3/4	5-1/8	35-1/2	2-1/4	1-3/8	3-1/4	5/16
21	44-1/2	10-7/8	46-1/4	1-1/2	1/2	4-1/2	7/8
24	44-1/2	10-7/8	46-1/4	1-1/2	1/2	5-1/8	7/8