

APPLICATION


- Recommended for supply air constant or variable air volume heating, cooling, or ventilating
- Efficient air distribution in cooling applications at temperature differentials as high as 30° F.
- Up to 20 air changes per hour (ACH)
- 360° air pattern delivery maintains horizontal pattern with or without ceiling effect
- Expanding cone design provides excellent horizontal air discharge preventing drafts in the occupied zone
- Surface mounted or exposed duct

PRODUCT FEATURES

- Fixed, 4 cone steel diffuser
- Quick, removable (without tools) inner cone assembly for easy, fast installation
- Arctic White baked-on finish


DIFFUSER OPTIONS

- Aluminum construction
- Custom or optional paint colors
- Accessories – see page G-2

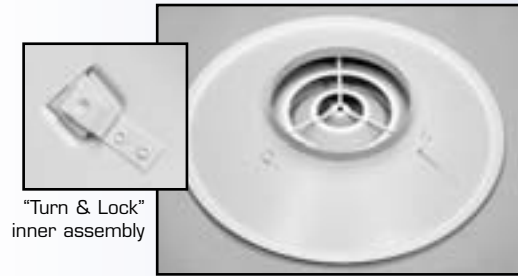

For plaque style (model CM-1P) see Architectural Section page B-19

4 - Cone Diffuser

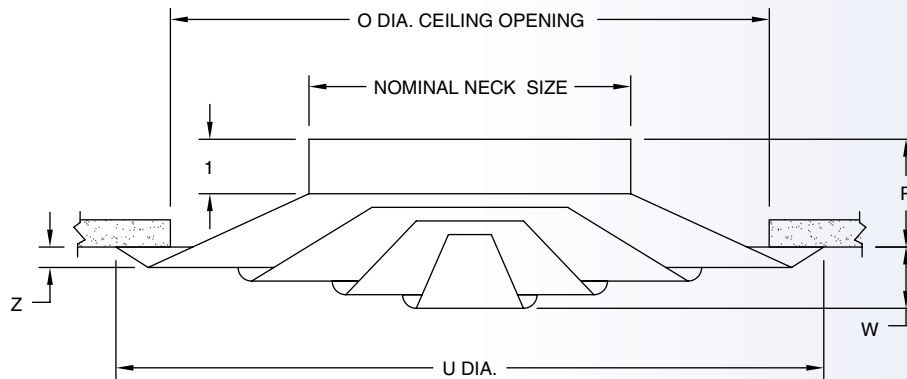

NOMINAL NECK SIZE	O	P	U	W	Z
6	10-1/2	2	13	3/4	3/8
8	16	2-1/2	18	1	1/2
10	21	3-3/8	24	1-1/8	1/2
12	21	2-7/8	24	1-1/8	1/2
15	31	4-3/8	34	1-3/8	1/2
18	31	3-3/4	34	1-3/8	1/2