


APPLICATION

- Unique, linear “slotted” air diffuser accepts ceiling tile to match grid system
- Recommended for constant or variable air volume heating, cooling, or ventilating
- Nominal 24 x 24 module size
- Lay-in T-bar or 9/16” narrow slot suspended grid systems

PRODUCT FEATURES

- 3/4” or 1” slot widths
- 1, 2, 3, or 4 perimeter slots
- “Ice Tong” design pattern/volume controllers
- Extruded aluminum frame and inner T’s for maximum corrosion protection
- Includes removable, steel square to round duct adapter (SRA) for easy flex duct connection
- White finish on extruded aluminum frame, black SRA interior
- Matching return for ducted or ceiling plenum return applications

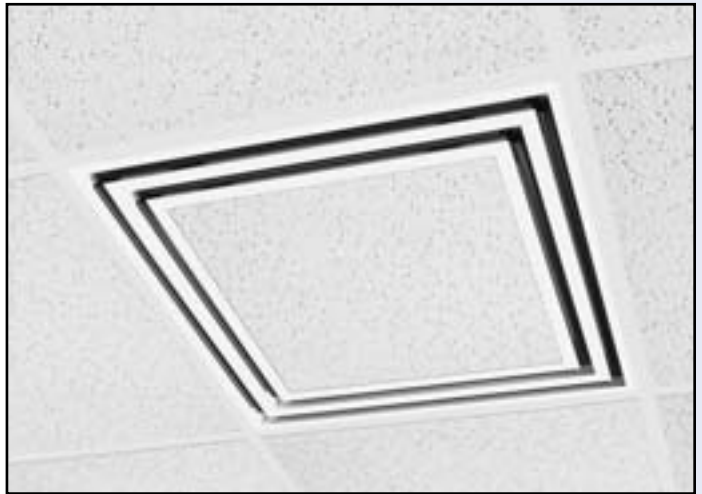


Model QLT (2 Slot Shown)

DIFFUSER OPTIONS


- 1/2” internal insulation
- Model **LS** light shield for ceiling return applications
- Custom color matching
- Model **VD** butterfly volume control damper
- Model **TBF** auxiliary mounting frame for hard / plaster ceilings

MODEL QLT - Lay-In T-Bar (4 Slot Shown)

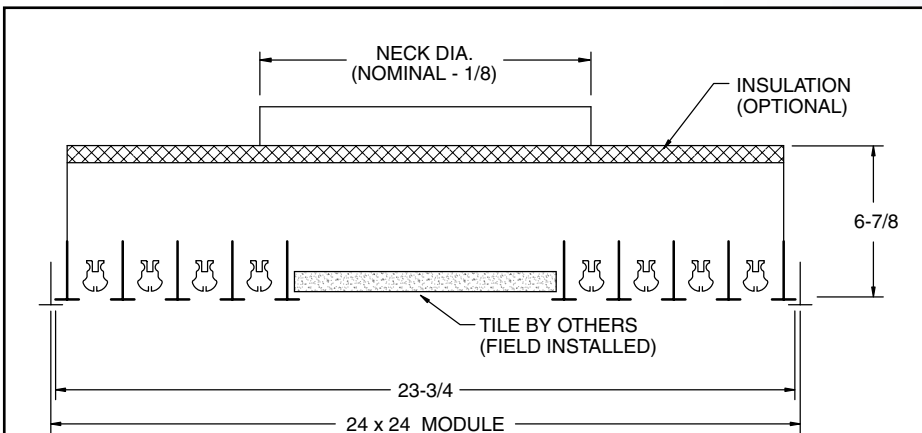

NUMBER OF SLOTS	SLOT WIDTH	TILE SIZE	INLET SIZE Ø
1	3/4	19-3/4	6, 7, 8, 9, 10, 12
	1	19-1/4	
2	3/4	16-3/4	
	1	15-3/4	
3	3/4	13-3/4	
	1	12-1/4	
4	3/4	10-3/4	
	1	8-3/4	

MODEL QLD

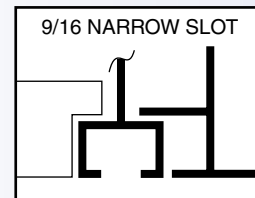

MODEL LS - Light Shield
For ceiling return application.

