

MODEL SLTL42

THIN LINE LOUVER, J/K 42° BLADE
EXTRUDED ALUMINUM, 0.465" DEEP, FIXED

FREE AREA CHARTS SQ. FT.(SQ. M)

LOUVER WIDTH


LOUVER HEIGHT	LOUVER WIDTH								
	IN. (mm)	12 (305)	24 (610)	36 (914)	48 (1219)	60 (1254)	72 (1829)	84 (2134)	96 (2438)
12 (305)		0.52 (0.05)	1.11 (0.10)	1.69 (0.16)	2.32 (0.22)	2.90 (0.27)	3.48 (0.32)	4.06 (0.38)	4.69 (0.44)
24 (610)		1.08 (0.10)	2.29 (0.21)	3.50 (0.33)	4.80 (0.45)	6.00 (0.56)	7.21 (0.67)	8.41 (0.78)	9.71 (0.90)
36 (914)		1.63 (0.15)	3.44 (0.32)	5.25 (0.49)	7.20 (0.67)	9.01 (0.84)	10.81 (1.01)	12.62 (1.17)	14.58 (1.35)
48 (1219)		2.19 (0.20)	4.62 (0.43)	7.05 (0.66)	9.68 (0.90)	12.11 (1.13)	14.54 (1.35)	16.97 (1.58)	19.60 (1.82)

FREE AREA PERCENTAGE (%)


LOUVER WIDTH

LOUVER HEIGHT	LOUVER WIDTH								
	IN. (mm)	12 (305)	24 (610)	36 (914)	48 (1219)	60 (1254)	72 (1829)	84 (2134)	96 (2438)
12 (305)		54.65	57.07	57.87	59.47	59.46	59.47	59.47	60.05
24 (610)		55.94	58.46	59.29	60.91	60.92	60.91	60.91	61.52
36 (914)		55.74	58.26	59.10	60.70	60.71	60.71	60.71	61.31
48 (1219)		56.13	58.65	59.49	61.11	61.12	61.12	61.12	61.73


FRAME OPTIONS

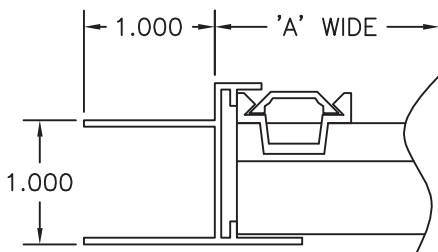

GLAZING FRAME
OPTIONAL

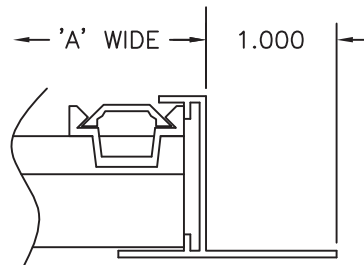

FLANGED FRAME
OPTIONAL



CHANNEL FRAME
OPTIONAL