

SUBMITTAL SHEET

www.anemostat-hvac.com

Model **AC30-V**
RETURN
 3/4" BLADE SPACING
 23/32" NARROW BORDER
 SEMI-CONCEALED SPLINE
 GRID SYSTEMS

PRODUCT FEATURES

- 23/32" Narrow border maximizes free area and appearance
- Designed to work with 15/16" Inverted T-Bar grid systems.
- Bend-out clips locate the face of the grille 1/2" below the face of the T-bar.
- 0° or 45° fixed louver deflection option
- Optional steel, aluminum, or stainless steel opposed-blade volume control damper (OBD)

CONSTRUCTION DETAILS


- Material: 20 GA Cold Rolled Steel
 Frame (std)
- 18 GA Aluminum (opt)
 - 22 GA 304 Stainless Steel (opt)
- Finish: Arctic White (std)
- Custom Colors (opt)

Models

- AC30 - V - 0 0° deflection
- AC30 - V - 45 45° deflection

Accessories

- OBD-1 Opposed Blade Damper

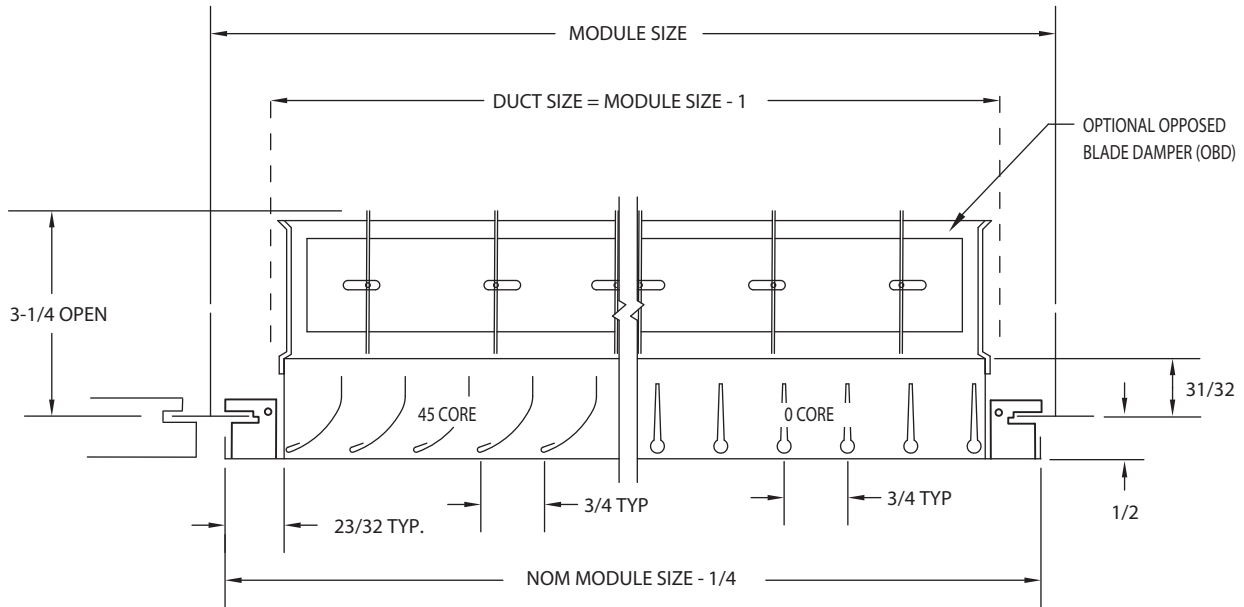

AVAILABLE LAY-IN T-BAR MODULE SIZES	NOMINAL DUCT SIZE
12 X 12	11 X 11
12 X 24	11 X 23
24 X 24	23 X 23
24 X 48	23 X 47

NOTE: LOUVERS ARE PARALLEL TO LONGER DIMENSION AS STANDARD

IMPORTANT : DO NOT RELY SOLELY ON BEND-OUT CLIPS TO SUPPORT THE GRILLE FROM THE T-BAR.
 THE GRILLE MUST BE SUPPORTED BY HANGER WIRES, STRAPS, DUCTWORK, OR OTHER APPROVED MEANS.

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: